

LIVING DISTRICT

Collection: Axl


Installation manual for:

LD656D24 D24"H23" L6

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L" wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N" wire from the fixture.
3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws (P4) in side of top unit the mounting bracket.
6. Put the lamp arm (P15) to the right position.
7. Connect the top suction plate (P5) and the boom (P9),(P10),(P11) to the lamp body.
8. Put the canopy (P5) on the mounting bracket (P1) and use the Cap nut (P6) to screw tighten.
9. Put the plastic pad (P20) into the glass lamp shade (P19), then put it into the socket (P18), and lock it with the lamp ring (P21).
10. Install E26 light source, no include bulb.

The end!

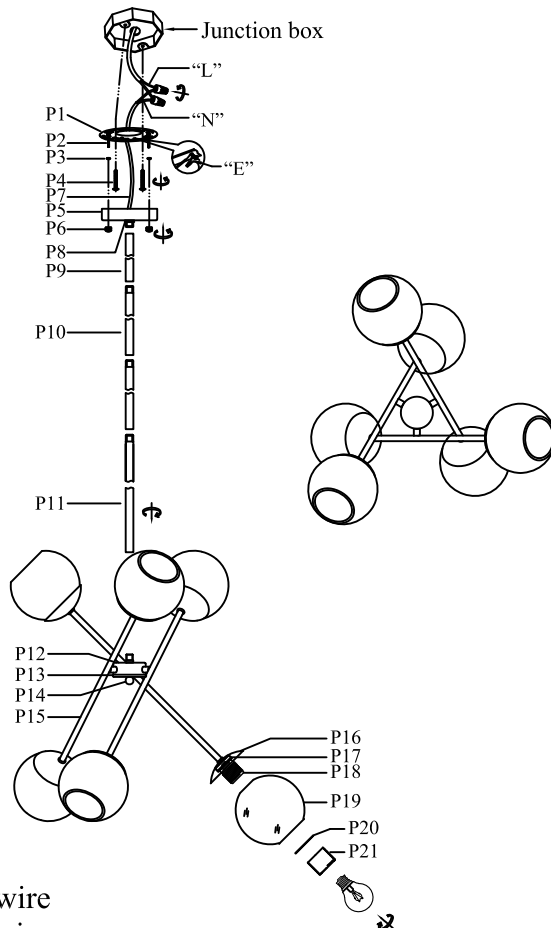

"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire

PARTS LIST

Part	Picture	Description	Qty	Check list
P1		L4" Mounting bracket	1	
P2		5/32-32 Screw	2	
P3		Hex nut	2	
P4		5/32-32 Screw	2	
P5		D4.72" Canopy cover	1	
P6		Cap nut	2	
P7		Power Cord 5.2' Black/Gold	1	
P8		Coupling	2	
P9		D0.63" * L6" ROD	1	
P10		D0.63" * L12" ROD	2	
P11		D0.63" * L16" ROD	1	
P12		D2.76" Metal Wire Box	1	
P13		D2.83" Wire Box	1	
P14		Cap nut	1	
P15		D0.46" * L19" Arm	3	
P16		D3.94" Receiver bowl	6	
P17		D1.65" Straight edge cover	6	
P18		E26 Socket	6	
P19		D5.9" * H5.4" Glass lampshade	6	
P20		Plastic pad	6	
P21		D2" Lamp ring	6	