

LIVING INSTRUCTRICT


Collection:Ollie

Installation manual for:
LD7016BR W20.6"*H4.7"*E3.5" L3

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws (P2) in side of top unit the mounting bracket.
6. With knurled nut (P10), plastic gasket (P9) crystal cloth (P8) lock on the lamp
7. Lock the lamp body on the mounting bracket (P1) on the wall with a flat head screw (P3)
8. Install G9 light source.(Bulbs not supplied)

The end!

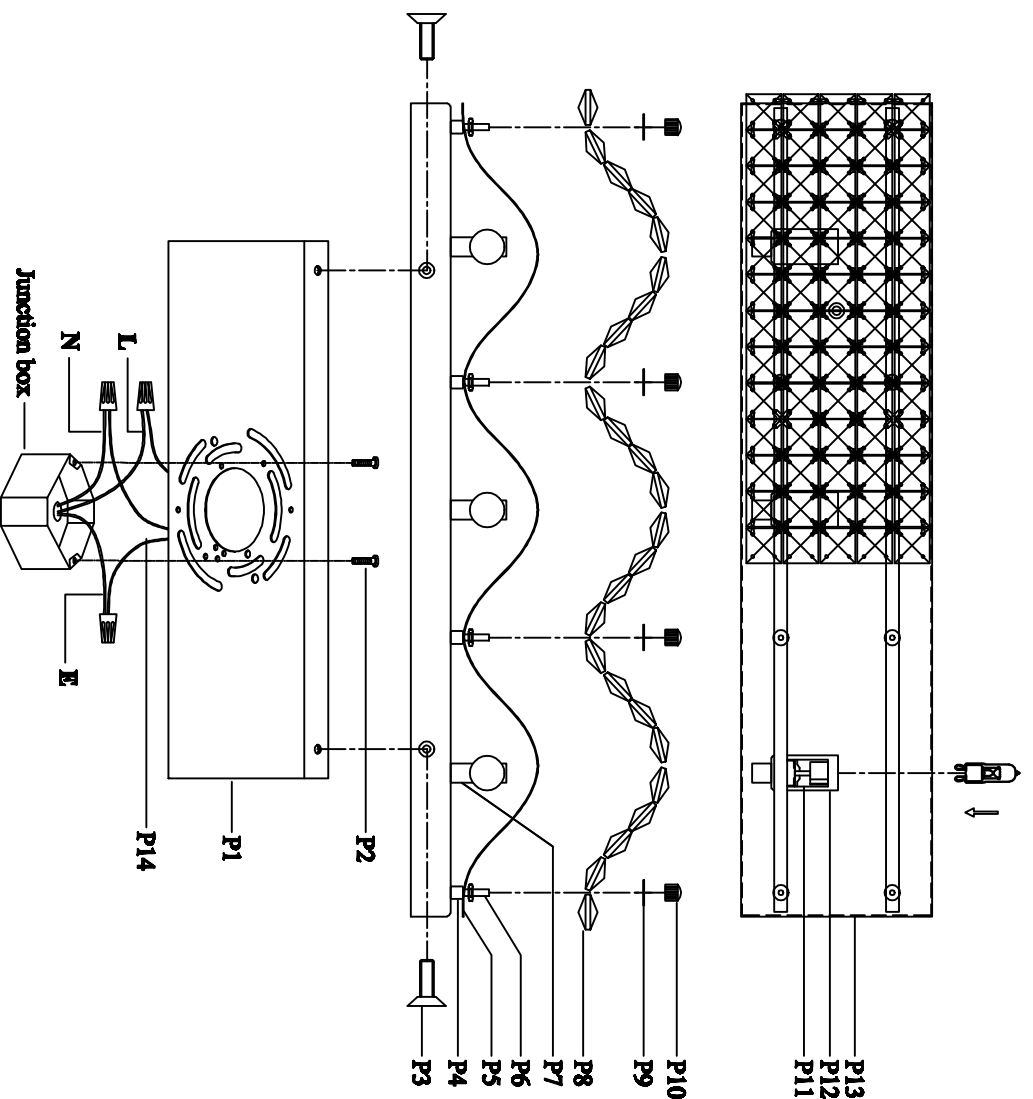

PARTS LIST

Part	Picture	Description	Qty	Check list
P1		Mounting bracket (L14.2*W4.4*H0.7)	1	
P2		Mounting bracket screw	2	
P3		Flat head Screw	2	
P4		Glass plate	8	
P5		Stainless steel bar L23.6"	2	
P6		M3 Round head screw	8	
P7		Square Iron Part	3	
P8		Crystal cloth	1	
P9		Plastic gasket	8	
P10		Knurled nut	8	
P11		G9 Ceramic Socket	3	
P12		40.9*H1.7* Lampholder, Iron (Ceramic)	3	
P13		Ceratomy(L20*W4.7*H1", Stainless steel)	1	
P14		18W Triaxial single filament Black and White Toden Vitas 12.8"	1	

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire