BISTRICT


Collection: Hanson Installation manual for:

LD7032W19 BK/BR/BRB/PN W18.6" E7.7" H11.7" L2

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert the mounting bracket screw(P2) into the mounting bracket (P1)
- 6.Use the screw(P3) to lock the lamp body to the mounting bracket (P1) on the ceiling.
- 7.Install E12 light source.(Bulbs not supplied)
- 8.Twist the glass ball(P11) onto the lamp body(P7)

The end!

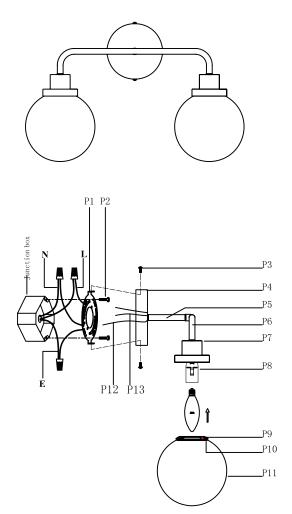

Part	Picture	Description	Qty	Check list
P1		mounting bracket Φ4.53″*H0.59″	1	-
P2	(Cumming)	Mounting bracket screw	2	
Р3	ı	Screw	2	
P4		Backplate (Φ4.72"*H0.98")	1	
Р5		head tube (L4.8"*H2.6")	1	
Р6		Double head tube (L13.2"*H2.6")	1	
P7		Double layer cup Φ3"*H1.8"	2	
P8		E12 holder	2	
Р9	~	Aluminum ring Φ2.7"*H0.3"	2	
P10	Ç	Plate Φ1.8"*T0.1"	2	
P11		Glass shade Φ5.9"*H5.7"	2	
P12		UL18#Ground wire, L9.84"	1	
P13	\approx	UL18#, L6″	1	

[&]quot;L" = Hot wire

[&]quot;N" = Neutral wire

[&]quot;E" = Ground wire