


Collection: Westley Installation manual for:

LD7048D24BK/BR D24" H16.9" L6

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Twist tube(P8) to wire box(P9), connect chain(P6) to Toothed ring (P7), connect chain(P6) to canopy(P4)
- 6. Separate and adjust the lamp arms, Use the screw(P3) to lock the lamp body to the mounting bracket(P1) on the ceiling.
- 7.Locking the metal wire (P11) on the metal part(P15) by spanner(P17) and M4 screw(P18).
- 8.Put the Socket tube(P12) on socket(P13), and install E12 light source. (Bulbs not supplied) The end!

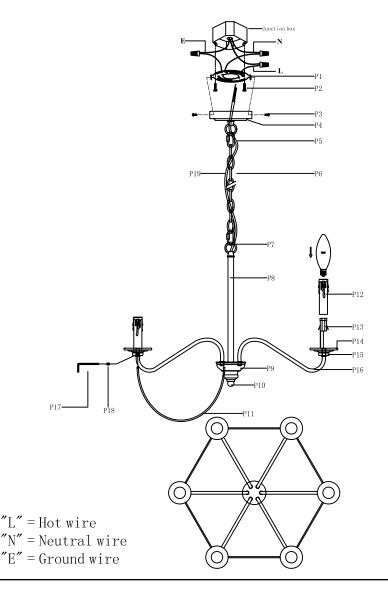

Part	Picture	Description	Qty	Check list
P1		mounting bracket Ф4.53"*H0.59"	1	
P2	gjjjjjjjj	Mounting bracket screw	2	
Р3	•	Screw	2	
P4		Сапору (Ф4.72"*H1.02")	1	
P5	G	Activity buckle L1.5″*W0.78″*⊄0.15″	2	
Р6	→	Hanging chain(CHAINO4P) L1.5"*₩0.78"*Φ0.15"(Total lenghth 59")	1	
P7	Q	Toothed ring W1.3"*H1.6", M10	2	
Р8		Tube Ф0. 63″*L11. 81″	1	
Р9		wire box cover Φ3.31"*H2.17"	1	
P10	0	nut Φ0.63″*H0.51″,M10	1	
P11		Metal wire W9.8"*H6.1"	6	
P12		Socket tube Φ0.98"*H3.94"	6	
P13		E12 holder	6	
P14	•	Dish Φ3.15"*H0.47"	6	
P15	©	Metal part Φ1.18"*H0.31"	6	
P16		Lamp arm L10"*H3.8"	6	
P17		Spanner	1	
P18	. •	M4*4 Screw	12	
P19	رسی	UL18#SVT-3, L78. 7"	1	