DISTRICT

Collection:


Installation manual for:

LDOD4010 W6.00" H8.00" E3.25" L1

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws(P2) in the side of the mounting bracket(P1).
- 6. Align the holes on the side of the base (P4) and secure with the screw (P5)

The end!

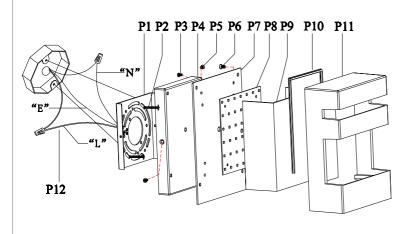

PARTS LIST

		T	T .		
part	picture	Description	Qty	Check	list
P1	9	Mounting bracket	1		
P2	-	5/32-32 Screw	2		
P3	#	Screw	4		
P4		Base	1		
P5	₩	Screw	2		
P6	€	M4 Screw	4		
P 7		Aluminum plate	1		
P8		LED 3000K	1		
P9		Diffuser	1		
P10	Π	Silicone rubber	1		
P11		Frame	1		
P12	~	Power wire 8" E327219 18AWG BLACK/WHITE	1		

"L" = Hot wire
"N" = Neutral wire

"E" = Ground wire