HINGISTRICT

Collection:


Installation manual for:

LDOD4011 W5.00" H4.88" E6.75" L1

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P2) in the side of the mounting bracket(P1).
- 6. Align the holes on the side of the base(P3) and secure with the screw (P4)

The end!

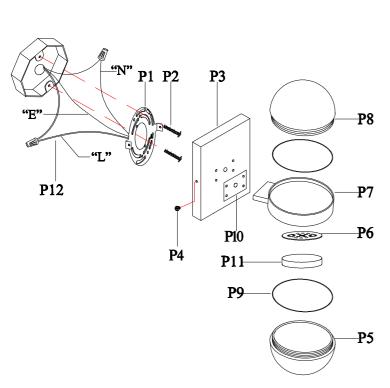

PARTS LIST

Part	Picture	Description	Qty	Check list
P1	\$	Mounting bracket	1	
P2		5/32-32 screw	2	
P3		Base	1	
P4	•	Screw	2	
P5	9	Glass	1	
P6	€	LED 3000K	1	
P 7		Aluminum fixture	1	
P8		Aluminum cover	1	
P9		silicone rubber	2	
P10	000	Silicone rubber	1	
P11		PC cover	1	
P12	~	Power wire 8" E327219 18AWG BLACK/WHITE	1	

L'' = Hot wire

"N" = Neutral wire

"E" = Ground wire