HINGISTRICT

Collection:


Installation manual for:

LDOD4030 W7.00" H7.13" E2.25" L1

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P2) in the side of the mounting bracket(P1).
- 6. Align the holes on the side of the base(P3) and secure with the screw (P4)

The end!

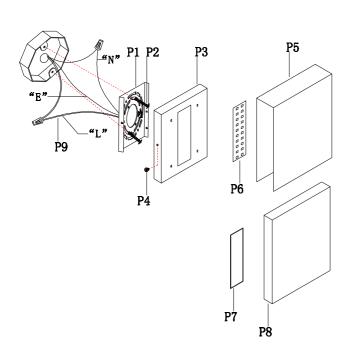

PARTS LIST

part	picture	Description	Qty	Check	list
P1	Ø	Mounting bracket	1		
P2	7	5/32-32 screw	2		
Р3		Base	1		
P4	•	Screw	2		
P5		Fixture	1		
P6		LED 3000K	1		
P7		Silicone rubber	1		
P8		Acrylic	1		
P9	~	Power wire 8" E327219 18AWG BLACK/WHITE	1		

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire