## HINGISTRICT

Collection:

Installation manual for:

**LDOD4032** W9.75" H5.25" E2.38" L1


## **Installation instructions:**

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P2) in the side of the mounting bracket(P1).
- 6. Align the holes on the side of the base(P4) and secure with the screw (P3)

The end!

## PARTS LIST Description Oty Check list

Picture

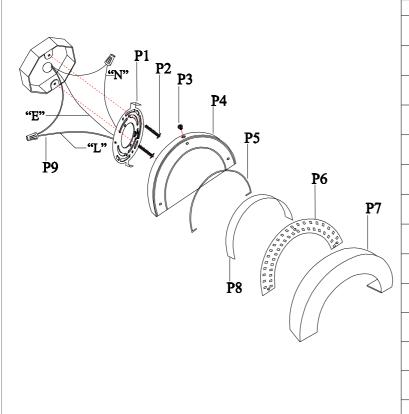

Picture	Description	Ųij	Check list
Ø	Mounting bracket	1	
-	5/32-32 screw	2	
•	Screw	2	
	Base	1	
	Silicone rubber	1	
	LED 3000K	1	
	Fixture	1	
	Acrylic	1	
~	Power wire 8" E327219 18AWG BLACK/WHITE	1	
	<b>Q</b>	Mounting bracket  5/32-32 screw  Screw  Base Silicone rubber  LED 3000K  Fixture  Acrylic  Power wire 8" E327219	Mounting bracket   1

L'' = Hot wire

"N" = Neutral wire

"E" = Ground wire