


196.3250 | Two Output Shower W/ Shower Head & Hand Held

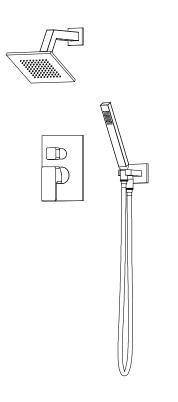

COMPONENTS

HS1020 - 7" Shower Arm
HSB.6S - 6" Shower Head
196.2100T - Shower Trim
PBV.1005A - Shower Valve
HS1003 - Hand Held Set

SHOWER VALVE:

- Pressure balance shower valve
- Valve includes service stops
- · Lift bottom handle to control volume
- Turn left for hot, right for cold.
- Top handle controls water diversion
- 1/2" NPT

SHOWER HEAD:

- Single function
- Solid brass construction
- 1.8 GPM flow rate

HAND HELD:

- Solid Brass construction
- 1.8 GPM flow rate
- With back flow prevention check valve

STANDARDS:

• ASME A112.18.1 / CSA B125.1


See individual component specification sheets on following pages for further details.

Legislation Compliance





HS1020 | Square Shower Arm



SPECIFICATIONS:

- Solid Brass Shower Arm
- With Sliding Flange

FAST SHIP FINISHES:

• Chrome - HS1020CP / Brushed Nickel - HS1020BN


Legislation Compliance



ZeroDrip Technology



Technical Diagram

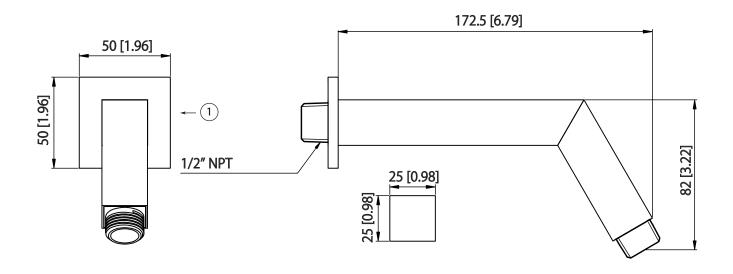


Part Number Guide:

1 Flange - HS1020-1253CP - Chrome HS1020-1253BN - Brushed Nickel



HSB.6S | 6" Brass Shower Head



SPECIFICATIONS:

- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 1.8 GPM Flow Rate
- 81 Nozzles
- Use with HS1020 Shower Arm


Legislation Compliance



ZeroDrip Technology





Technical Diagram



MATCHING SHOWER ARMS:

1) HS1020








196.2100 | Tub / Shower Trim Set With Pressure Balance Valve & 2-Way Diverter with Integrated Volume Control





SPECIFICATIONS:

- Includes Pressure balance valve (PBV1005A**) w/ service stops
- Lift Handle to control volume. Turn left for hot, right for cold.
- Small knob controls 2-way water diversion
- Pressure Balance Valve Flow Rate 5.5 GPM @ 60 PSI
- Extension Available PBV.2100E**

FAST SHIP FINISHES:

• Chrome - 196.2100CP / Brushed Nickel - 196.2100BN

** Denotes Finish (CP, BN, etc.)

[196.2100T**]



[PBV1005A**]





ZeroDrip Technology





See Spec Sheet For PBV1005A For Detailed Information On Valve.

Technical Diagram










Water Diversion Diagram

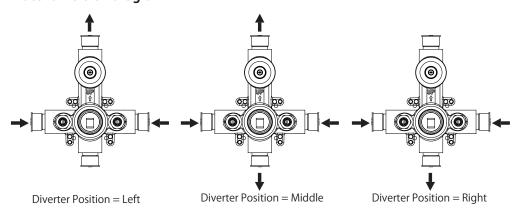




Universal Fixtures ™

PBV1005A | Pressure Balance Valve With Integrated 2-Way Diverter Page 1 of 2





SPECIFICATIONS:

- Lift Handle to control volume. Turn left for hot, right for cold.
- Knob controls 2-way water diversion shared output.
- Pressure Balance Valve Flow Rate 5.5 GPM @ 60 PSI

FAST SHIP FINISHES:

• Chrome - PBV1005ACP / Brushed Nickel - PBV1005ABN /

STANDARDS:

• ASME A112.18.1 / CSA B125.1

WARRANTY:

• Limited lifetime warranty to the original consumer purchaser against finish and workmanship


Legislation Compliance











Technical Diagram



















Universal Fixtures ™

PBV1005A | Pressure Balance Valve With Integrated 2-Way Diverter Page 2 of 2



Water Diversion Diagram

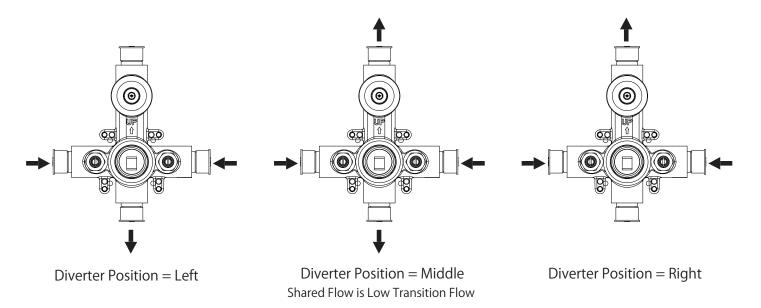



HS1003 | Solid Brass Hand Shower Set



SPECIFICATIONS:

- Solid Brass construction
- Single function hand held
- 1/2" female elbow connection
- Includes check valve with back-flow prevention
- 1.8 GPM Flow Rate

Legislation Compliance



ZeroDrip Technology



Technical Diagram

