


TVH.4420 | 3/4" Thermostatic Valve With 2-Way Diverter & Integrated Volume Control

Page 1 of 2

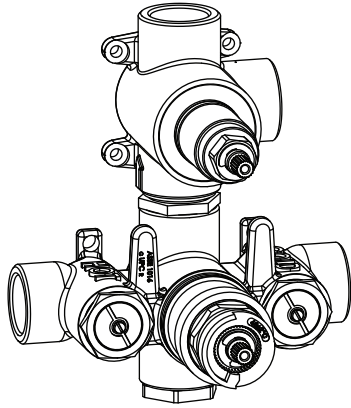

SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 13.0 GPM @ 60 PSI
- Extension Available - TVH.4101E**

STANDARDS:

- ASME A112.18.1 / CSA B125.1



A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

CALGreen Compliant




Legislation Compliance



ZeroDrip Technology



Technical Diagram

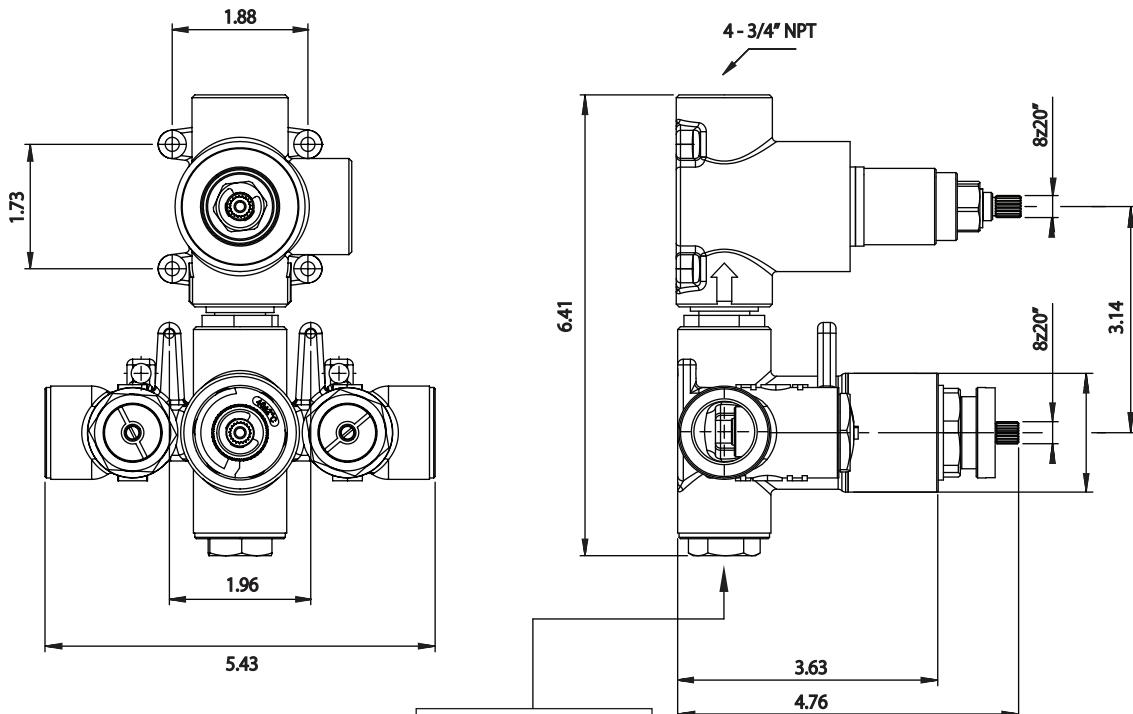

Note: Pre-Installed cap cannot be removed unless a separate volume control or diverter is purchased

TVH.4420 | 3/4" Thermostatic Valve With 2-Way Diverter & Integrated Volume Control

Page 2 of 2



Water Diversion Diagram

