


# TVL.2700 | 3/4" Thermostatic Valve With 2-Way Diverter And Integrated

Volume Control Page 1 of 2



#### SPECIFICATIONS:

- Turn Lower Handle to control temperature.
- Upper Handle controls volume & 2-Way water diversion.
- Thermostatic Valve Flow Rate 9.0 GPM @ 60 PSI
- 0.8" Extension Kit Part # TVL.2700E\*\*
- No Shared Ports

#### FINISHES:

• Rough Brass - TVL.2700

#### **STANDARDS:**

• ASME A112.18.1 / CSA B125.1



A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

**CALGreen Compliant** 




Legislation Compliance





ZeroDrip Technology





## **Technical Diagram**














# TVL.2700 | 3/4" Thermostatic Valve With 2-Way Diverter And Integrated Volume Control $_{\text{Page}\,2\,\text{of}\,2}$



# **Water Flow Diagram**

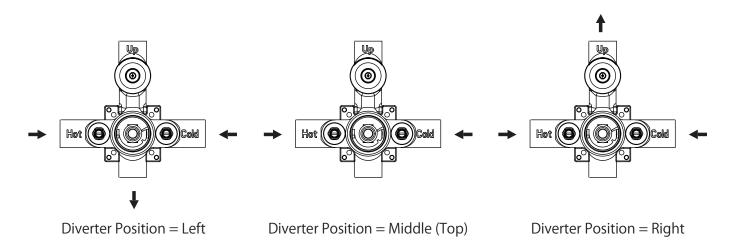

### **Trims**

