


Vivere[®] Collection Specifications

AI3052 SL/SR



MicroSilk[®]

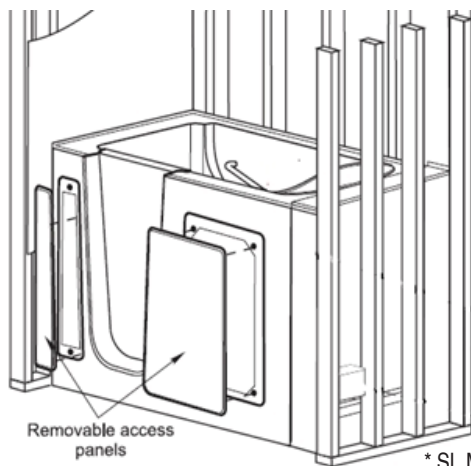

* SL Model shown

M MicroSilk[®] Unit Location

C Control Location

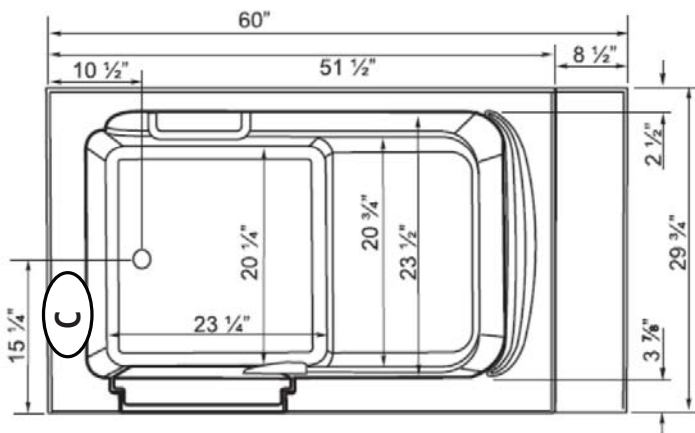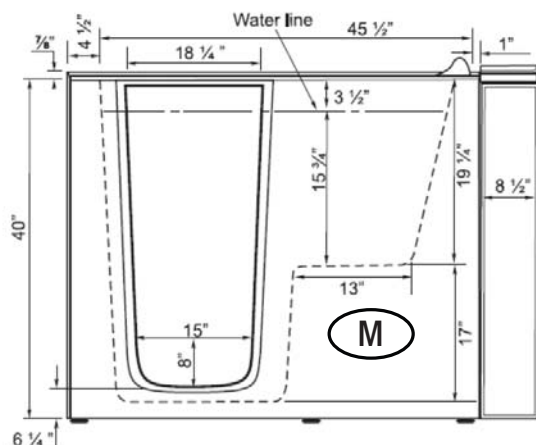


Patents received or pending.

Note: Dimensional Tolerances: $\pm 1/4"$

Dimensions:	29.75" x 51.5" x 40"
Seat Height:	17"
Seat Dimensions:	13"L x 19.25"W x 20.25"H
Operating Capacity:	70 Gal.
Overflow Capacity:	75 Gal.
Floor Loading / sq.ft.:	115.7 lbs/sq.ft.
Carton Wt.:	270 lbs.
Cube:	44.6 ft. ³

Air Switch
Control



Includes a quiet, 120V MicroSilk[®] System, (2) Chromatherapy Mood lights, Automatic Ozone System, an air switch On/Off Control, and a 20-minute timer. Requires (1) 20A, 120V GFCI protected circuit.

Construction: Reinforced Dura Coat Shell mounted onto stainless steel frame.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

- 8 1/2" Extension panel included to fit a 60" space
- Waste & Overflow drain kit included
- Left (SL) or Right (SR) door configurations available