
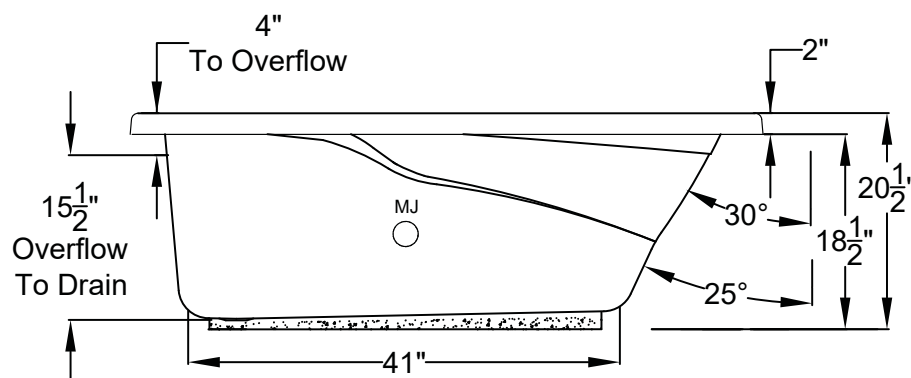


Integrity[®] Collection Specifications

B3060

MicroSilk[®]

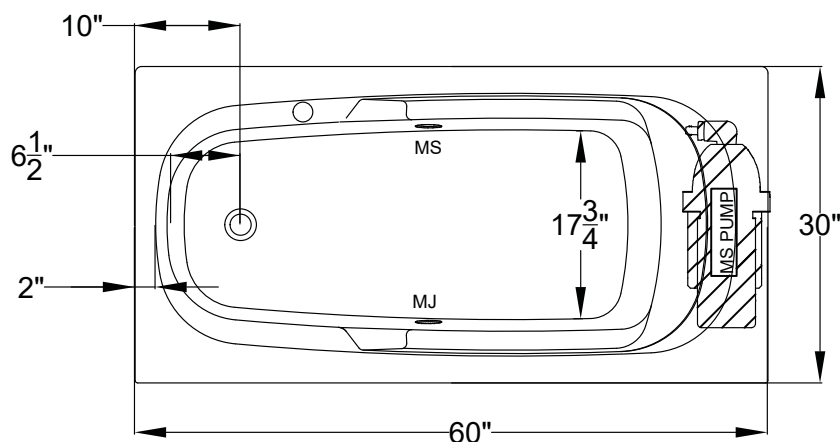

Patents received or pending.

Note: Dimensional Tolerances: $\pm 1/4"$

Drop-in-Hole Size:	28" x 58"
Operating Capacity:	29 Gal.
Overflow Capacity:	48 Gal.
Floor Loading / sq.ft.:	49.3 lbs.
Carton Weight:	101 lbs.
Cube:	26.4 ft. ³

Air Switch
Control



Includes a quiet, 120V MicroSilk[®] System, 1 MicroSilk[®] Delivery Port. Requires (1) 20A, 120V GFCI protected circuit.

Construction: Reinforced Acrylic shell mounted on Level Form[™] pre-leveled full support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.