

JASSON, BASSON, BASSON

Integrity® Collection Specifications K3672 MicroSilk®

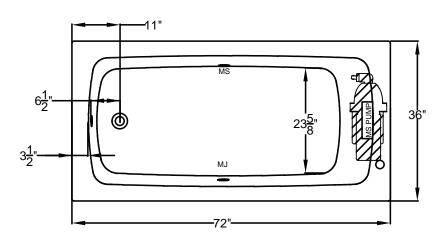

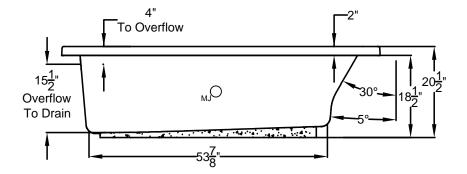

Note: Control Air Switch will be located on bather's left.

Patents received or pending. Note: Dimensional Tolerances: ±1/4" Includes a quiet, 120V MicroSilk® System, Air Switch Control 1 MicroSilk® Delivery Port. Requires (1) 20A, 120v **Drop-in-Hole Size:** 34" x 70" GFCI protected circuit. **Operating Capacity:** 50 Gal. **Overflow Capacity:** 84 Gal. Construction: Reinforced Acrylic shell mounted on Floor Loading / sq.ft.: 47.6 lbs. Level Form[™] pre-leveled full support base. **Carton Weight:** 119 lbs. 37.3 ft.³ We provide products listed with Intertek ETL SEMKO Cube: (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical

Copyright © 2018 Jason International. Integrity® Collection

requirements.

Officials (IAPMO). Consult factory with your listing