


forma[®] Collection Specifications

RC553

MicroSilk[®]

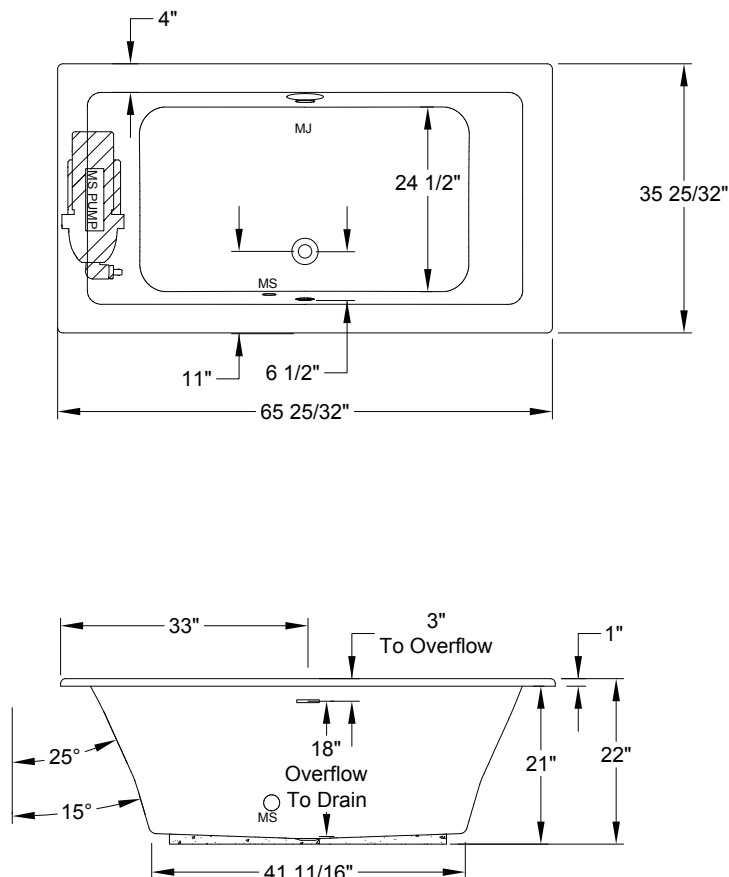

Patents received or pending.




Includes Linear Overflow Drain Assembly

Note: Dimensional Tolerances: $\pm 1/4"$

| | |
|--------------------------------|-----------------------|
| Drop-in-Hole Size: | 34" x 64" |
| Operating Capacity: | 45 Gal. |
| Overflow Capacity: | 88 Gal. |
| Floor Loading / sq.ft.: | 48.7 lbs. |
| Carton Wt: | 118 lbs. |
| Cube: | 36.6 ft. ³ |

Construction: Fiberglass reinforced acrylic bath with Level Form[™] full-support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

| | |
|------------------|--|
| Standard |  <p>A 120V system that includes a MicroSilk unit; an electronic control; and a 20-minute timer.</p> |
| Premier |  <p>A 120V system that includes a MicroSilk unit; (2) Chromatherapy mood lights, Automatic Ozone System; an electronic control; and a 20-minute timer. The keypad also operates the LED Chromatherapy mood lights.</p> |
| Signature |  <p>A 120V system that includes a MicroSilk unit, (2) Chromatherapy mood lights; Automatic Ozone System; a digital control with LCD display window; low water and water temperature sensors; and a 20-minute timer. Control keypad operates the MicroSilk[®] unit, LED Chromatherapy mood lights and shows water temperature and time remaining. Includes Bluetooth Sound Immersion.</p> |