

Features

- Comfort Depth® design offers a convenient 19" step-over height while retaining the same depth as a standard 21" bath.
- Generous length provides a spacious bathing area.
- Integral lumbar support.
- Slotted overflow allows for deep soaking.
- Textured bottom surface.
- Coordinates with other products in the Archer collection.
- 72" (1829 mm) x 36" (914 mm) x 19" (483 mm)

Material

Acrylic.

Installation

- Drop-in.
- Reversible drain.

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Products/Accessories

K-9529 Removable Bath Seat K-24916 Wireless Music Kit K-23726 Drain treatment K-23732 Tub & shower cleaner



ADA

Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 ADA ICC/ANSI A117.1

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
100	G9	Sandbar
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™








Archer®

72" x 36" drop-in bath **K-1125**

No change in measurements if connected with drain illustrated. (K-7272)



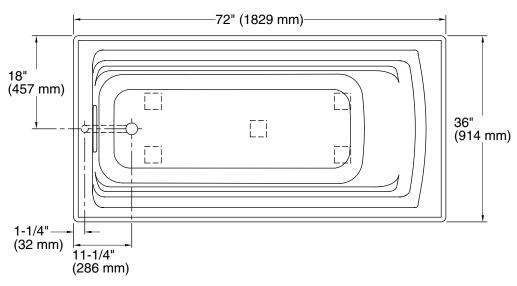

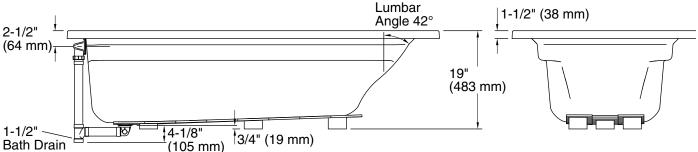

Technical Information

All product dimensions are nominal.

Installation: Drop-in

Drain location: Reversible

Basin area, bottom: 51-3/8" x 21" (1305 mm x 533 mm)
Basin area, top: 64-1/2" x 30-1/2" (1638 mm x 775 mm)

Weight: 70 lbs (31.8 kg)

 $Minimum\ floor\ load: \quad 39\ lbs/ft^2\ (190.4\ kg/m^2)$

Water depth: 15" (381 mm)
Water capacity: 72 gal (272.5 L)

Cutout: Drop-in, 70-1/2" x 34-1/2" (1791 mm x

876 mm)

Minimum flat for 1-9/16" (40 mm)

door:

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary

This product is designed for drop-in installation only. It is not suited for use in a three-wall alcove with an overhead shower.

ADA compliant when installed to the specific requirements of these regulations.

