

Features

- Advanced spray engine provides two spray experiences: full coverage and targeted massage.
- Full coverage spray produces an encompassing spray ideal for everyday use.
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray.
- Intuitive and easy push-button activation to switch between two sprays.
- Ergonomic design is comfortable and easy to grip.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- 2.5 gpm (9.5 lpm) maximum flow rate.
- Contains flow-regulating check valve for backflow prevention.

Material

• KOHLER finishes resist corrosion and tarnishing.

Installation

- Bracket or slidebar required for wall-mount installation.
- Deck-mount holder required for deck-mount installation.

Required Products/Accessories

K-8593 72" Shower Hose

or

K-9514 60" Shower Hose

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

K-9660 Vacuum Breaker





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 OBC

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color Code Description

CP	Polished Chrome
SN	Vibrant® Polished Nickel
BGD	Vibrant® Moderne Brushed Gold
BN	Vibrant® Brushed Nickel
BV	Vibrant® Brushed Bronze
2BZ	Oil-Rubbed Bronze
BL	Matte Black
2MB	Vibrant® Brushed Moderne Brass
RGD	Vibrant Rose Gold
TT	Vibrant Titanium

Shift®+ Square

2.5 gpm multifunction handshower with Katalyst® **K-21336**

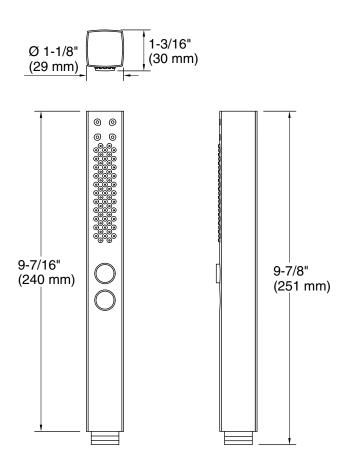

Technical Information

All product dimensions are nominal.

No

KOHLER, Faucets

Drain included:

Handshower:

Rated maximum flow:

2.5 gal/min (9.5 l/min)

Notes

For use with automatic compensating valves rated at 2.2 gal/min (8.3 l/min) or less. Install this product according to the installation instructions.

Plumbing codes may require that a vacuum breaker be installed in-line to handshowers. Please consult local plumbing codes.

OBC compliant when installed to the specific requirements of these regulations.

