

Features

- Significantly reduces bacteria, virus, cyst, chlorine and lead.
- Filter head automatically turns off the water supply when cartridge is removed.
- Replacing the Ultra-filter every 12 months keeps filtration system performing effectively.
- For cold water use only.

Material

- High-impact plastic construction.

Installation

- Under-sink.
- Quarter-turn twist cartridge for easy installation and replacement.




Codes/Standards

CSA B483.1
NSF/ANSI 42
NSF/ANSI 53
NSF/ANSI 401
NSF Protocol P231

KOHLER® Water Filter Systems Five-Year Limited Warranty

See website for detailed warranty information.

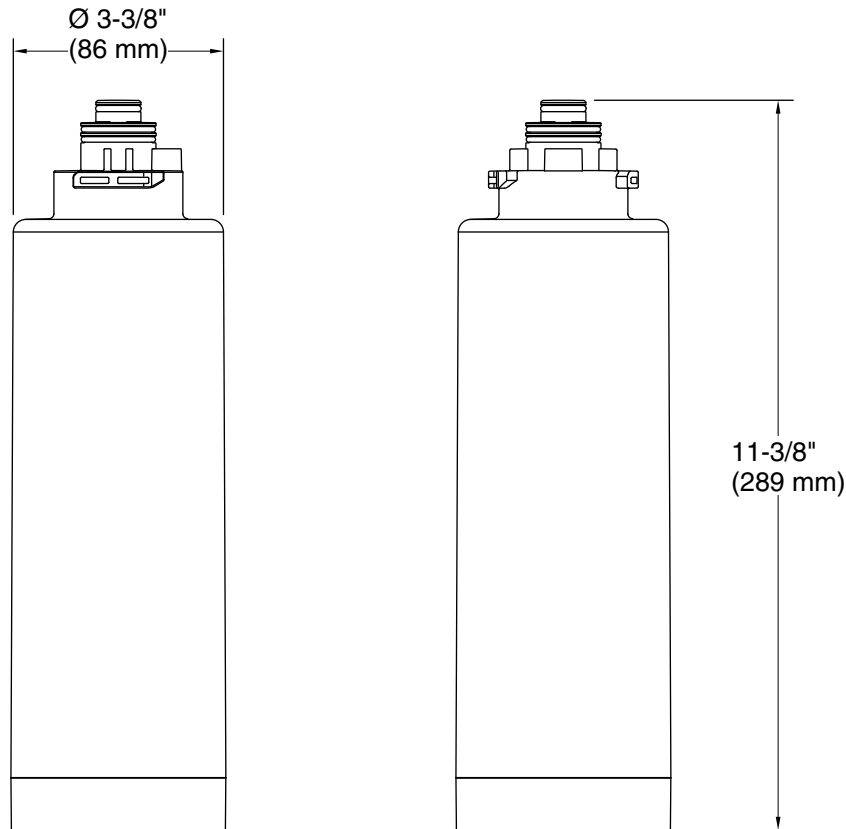

Technical Information

All product dimensions are nominal.

Notes

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters:

Water Pressure: 40-100 psi (276-689 kPa)

Water Temperature: 40-100°F (4.4-37.8°C)

Capacity: 230 gal (871 L).