

Deck-mount bath/shower digital interface K-29205

#### Features

- Simple, intuitive push-button control toggles between bath filler and shower outlet.
- Sleek, minimalist design.
- Easy-to-use temperature dial control.
- Suitable for bath/shower applications.
- Duration/countdown timer feature.
- Create up to ten personalized bath presets.
- Digital thermostatic valve technology guarantees accurate and safe temperature control.
- Adjustable high-temperature limit for added safety.
- Compatible with the KOHLER Mode app featuring Bluetooth<sup>®</sup> wireless technology to provide remote on/off capability and setting adjustments.

### Installation

Deck-mount.

#### **Required Products/Accessories**

K-528-PM Two-port digital thermostatic valve

#### **Recommended Products/Accessories**

K-23723 Faucet cleaner

#### **Included Components**

Additional Components: Mounting hardware RJ11 Cable extension 20 ft RJ11 Coupler Removal tool



## **Codes/Standards**

UL 1951 CSA C22.2 No. 14 CSA C22.2 No. 68

# KOHLER<sup>®</sup> Electronic Faucets, Valves, and Controls Five-Year Limited Warranty

See website for detailed warranty information.

The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license. Other trademarks and trade names are those of their respective owners.

# **Available Colors/Finishes**

Color tiles intended for reference only.

#### **Color Code Description**



CP Polished Chrome


BL Matte Black



# KOHLER, Faucets

# DTV Mode®

Deck-mount bath/shower digital interface K-29205

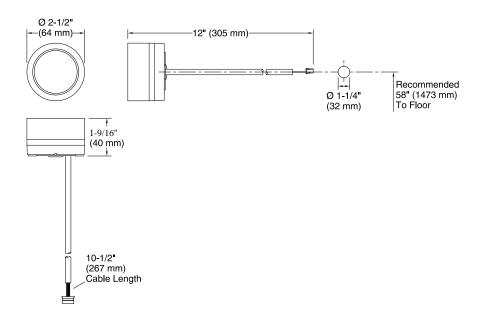

# **Technical Information**

All product dimensions are nominal. Drain included: No Bluetooth® range: 32 ft (9.8 m) Bluetooth® version: 4.1 Max. Ambient temp: 140°F (60°C) 86°F (30°C) Min. Operating temp: Max. Operating 120°F (48.9°C) temp: Max. Relative 100% humidity condensing:

