## Wellworth® Classic



Two-piece elongated 1.6 gpf toilet, less seat K-3505-RA

#### Features

- Vitreous china.
- Elongated bowl offers added room and comfort.
- Equipped with Sloan FLUSHMATE<sup>®</sup> Sloan<sup>®</sup> Valve Company.
- Polished Chrome trip lever.
- 1.6 gpf (6.0 lpf)
- 12" (305 mm) x 10" (254 mm) water area.

#### Installation

- Seat and supply line sold separately.
- Standard 12" (305 mm) rough-in.

#### **Recommended Products/Accessories**

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat K-5588 Purefresh® Elongated Toilet Seat K-4108 C<sup>3</sup>®-230 Elongated bidet toilet seat K-5420 Low-Profile Bolt Caps

#### Included Components

Product consists of: K-4303 Toilet bowl, less seat K-4645-RA Toilet tank, 1.6 gpf Additional Components: Bolt cap accessory pack Equipped with Sloan FLUSHMATE® – Sloan® Valve Company Tank accessory pack Tank cover Trip lever



#### **Codes/Standards**

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992

#### KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.

Color Code Description


0 White 96 Biscuit





# Wellworth® Classic

Two-piece elongated 1.6 gpf toilet, less seat K-3505-RA

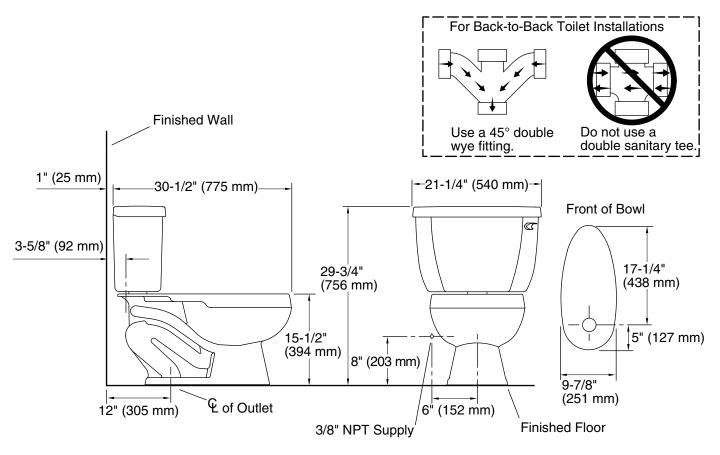

#### **Technical Information**

All product dimensions are nominal.	
Two-piece, Floor-mount	
Floor	
Elongated	
Pressure Lite®	
2-1/4" (57 mm)	
1.6 gpf (6 lpf)	
12" x 10" (305 mm x 254 mm)	
5-5/8" (143 mm)	
12" (305 mm)	
5-1/2" (140 mm)	

### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

#### **Fixture Supply Requirements**

Min static pressure: 20 psi (137.9 kPa) Max static pressure: 80 psi (551.6 kPa)

