KOHLER®

Highline® Comfort Height®

Two-piece elongated 1.28 gpf chair height toilet K-3949-TR

Features

- Two-piece design.
- Elongated bowl offers added room and comfort.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.28 gpf (4.8 lpf).
- Right-hand Polished Chrome trip lever.
- Tank cover locks included.
- Combination consists of the K-4841-TR tank and the K-4199 bowl.

Technology

- Single-flush gravity uses the force of gravity and a precisionengineered tank, bowl, and trapway to create a strong siphon during flushing.
- Class Five® flushing technology offers virtually plug-free performance and rinsing power for a clean bowl.

Installation

- Three-bolt quick-connect installation.
- Seat and supply line sold separately.

Water Conservation & Rebates

Eligible for consumer rebates in some municipalities.

Recommended Products/Accessories

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat

K-5588 Purefresh® Elongated Toilet Seat

K-4108 C3®-230 Elongated bidet toilet seat

K-5420 Low-Profile Bolt Caps

K-9379 Trip Lever

1023457 Wax Ring/Hardware Kit

1265114 Connector Hose

K-23726 Drain treatment

Included Components

Product consists of:

K-4199 Two-piece elongated chair height toilet bowl K-4841-TR Toilet tank with cover locks, 1.28 gpf

Additional Components:

Bolt cap accessory pack

Tank accessory pack

Tank cover

Trip lever





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit



KOHLER®

Highline® Comfort Height®

Two-piece elongated 1.28 gpf chair height toilet K-3949-TR

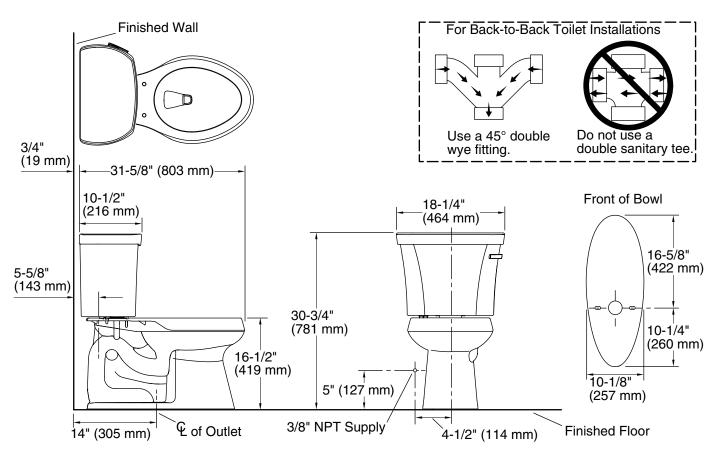

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Flush type: Class Five®
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 11-3/8" x 8" (289 mm x 203 mm)

Rim to water 5-3/8" (137 mm)

surface:

Rough-in: 14" (356 mm) Seat-mounting 5-1/2" (140 mm)

holes:

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

