



**Stratton™ Water-Guard®**  
 Flushometer valve elongated blow-out toilet bowl  
**K-4450-C**

**Features**

- Vitreous china.
- Elongated bowl offers added room and comfort.
- Blow-out.
- Wall-mount.
- 1½" (38 mm) top spud.
- 3.5 gpf (13.2 lpf).
- 14-1/2" (368 mm) x 11-3/8" (289 mm) water area.

**Installation**

- This product is not designed or intended for bariatric use.

**Recommended Products/Accessories**

- K-4670-C Lustra™ Commercial Elongated Toilet Seat
- K-4670-CA Lustra™ Commercial Elongated Toilet Seat

**Included Components**

- Additional Components:  
 Spud



**ADA** **CSA B651** **OBC**

**Codes/Standards**



- ASME A112.19.2/CSA B45.1
- DOE - Energy Policy Act 1992
- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC


**KOHLER® One-Year Limited  
 Warranty**

See website for detailed warranty information.

**Available Colors/Finishes**

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	7	Black Black™

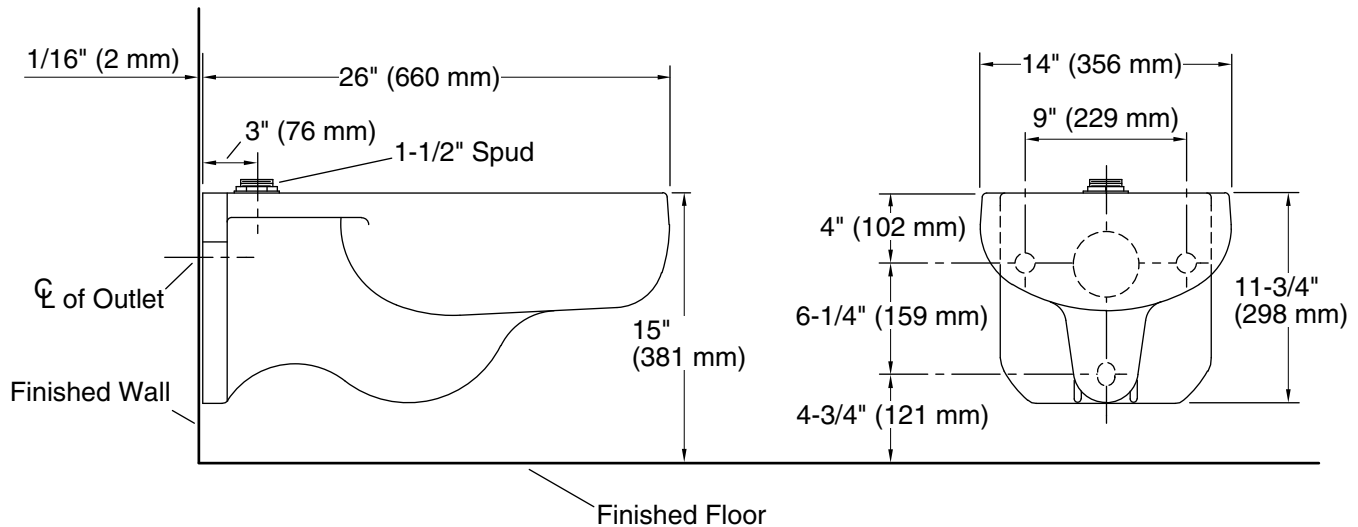

### Technical Information

All product dimensions are nominal.

Toilet type:	One-piece, Wall-mount
Waste Outlet:	Wall
Bowl shape:	Elongated
Spud size:	1-1/2", Inlet, Top
Trap passageway:	2-3/4" (70 mm)
Water Consumption	
Full:	3.5 gpf (13.3 lpf)
Water surface size:	14-1/2" x 11-3/8" (368 mm x 289 mm)
Rim to water surface:	5-3/8" (137 mm)
Seat-mounting holes:	5-1/2" (140 mm)

### Fixture Supply Requirements

Min static pressure:	45 psi (310.3 kPa)
Max static pressure:	80 psi (551.6 kPa)
Min flowing pressure:	35 psi (241.3 kPa)
Min flow rate:	35 gpm (132.5 lpm)

### Notes

Install this product according to the installation instructions.

Refer to manufacturer and local codes for flush valve requirements.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.