

## Features

- 5-1/2 (140 mm) centers.
- Swivel/rigid gooseneck spout.
- 5-5/16" (135 mm) spout reach.
- 1/4-turn full brass ceramic valve.
- 2.0 gpm (7.6 lpm) maximum flow rate at 60 psi (4.14 bar).
- Vandal-resistant aerator.
- 4-1/16" vandal-resistant metal wristblade lever handles.
- Grid drain with tailpiece.

## Material

- Solid-brass construction with thick chrome plating for rough commercial applications.

## Installation

- Includes yoke for shelf-back installation.

## Recommended Products/Accessories

K-23726 Drain treatment  
K-23723 Faucet cleaner



**ADA**

**CSA B651**

**OBC**

## Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF/ANSI 61  
NSF/ANSI 372  
All applicable US Federal and State material regulations  
DOE - Energy Policy Act 1992  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

## KOHLER® One-Year Limited Warranty



See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

### Color Code Description

	CP	Polished Chrome
--	----	-----------------

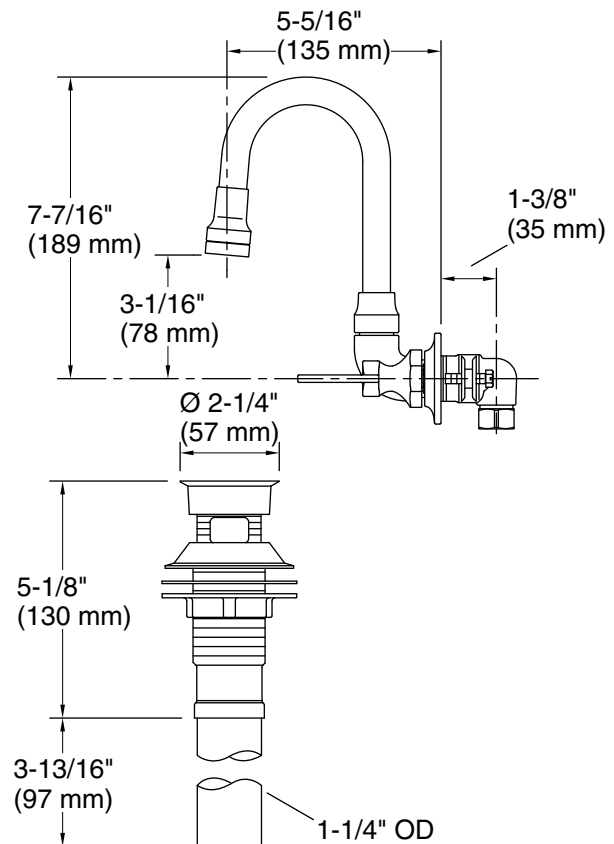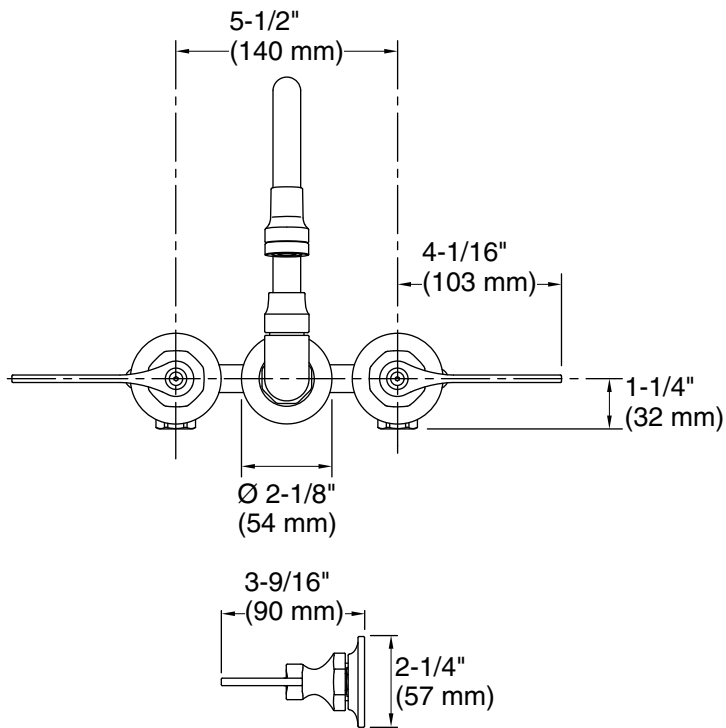

## Technical Information

All product dimensions are nominal.

### Faucet:

Flow rate: 2 gal/min (7.6 l/min)  
Pressure: 60 psi (4.1 bar)  
Valve body: Cast brass  
Drain included: Yes

### Spout:

Spout reach: 5-5/16" (135 mm)  
Handle clearance: 3" (76 mm)

## Notes

Install this product according to the installation instructions.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.