

# Triton® Bowe® industrial exposed shower K-630T40-4AG

#### **Features**

- 8" (203 mm) widespread faucet holes.
- 1/4-turn full brass ceramic valve.
- Includes Coralais® showerhead with 1.75 gal/min (6.6 l/min) maximum flow rate [max at 60 psi (4.14 bar)]; 30% more water saving than 2.5 gpm showerheads.
- 2-7/16" vandal-resistant metal lever handles.
- Drain sold separately.

#### Material

Solid-brass construction for durability and reliability.

#### **Recommended Products/Accessories**

K-23723 Faucet cleaner



#### Codes/Standards

None Applicable

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.


Color Code Description

CP Polished Chrome



### **KOHLER**, Faucets

# Triton® Bowe® industrial exposed shower K-630T40-4AG

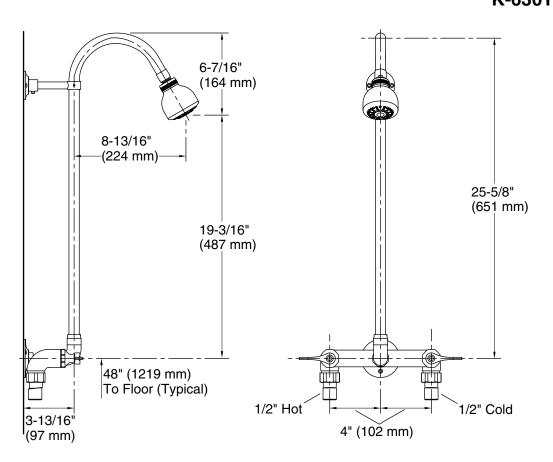

#### **Technical Information**

All product dimensions are nominal.

Valve body: Cast brass

Drain included: No

#### Showerhead/Body Spray:

Rated maximum 1.75 gal/min (6.6 l/min)

flow:

Pressure: 60 psi (4.1 bar)

#### **Notes**

For use with automatic compensating valves rated at 1.35 gal/min (5.1 l/min) or less. Install this product according to the installation instructions.

