Features
- 1/4" (6 mm) thick Crystal Clear tempered glass.
- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Smooth, quiet operation.
- Gently curved inside and outside towel bars complete the look of this door.
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

Material
- Tempered glass ensures maximum safety and durability.
- Anodized aluminum prevents rust and corrosion.

Installation
- Fits opening widths 49" - 52" (1245 mm –1321 mm).
- Out-of-plumb adjustability simplifies installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- For residential use only.
- Not for use in hospitality.

Recommended Products/Accessories
K-23723 Faucet cleaner

Included Components
Additional Components:
Hardware kit

Codes/Standards
ANSI Z97.1
CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty
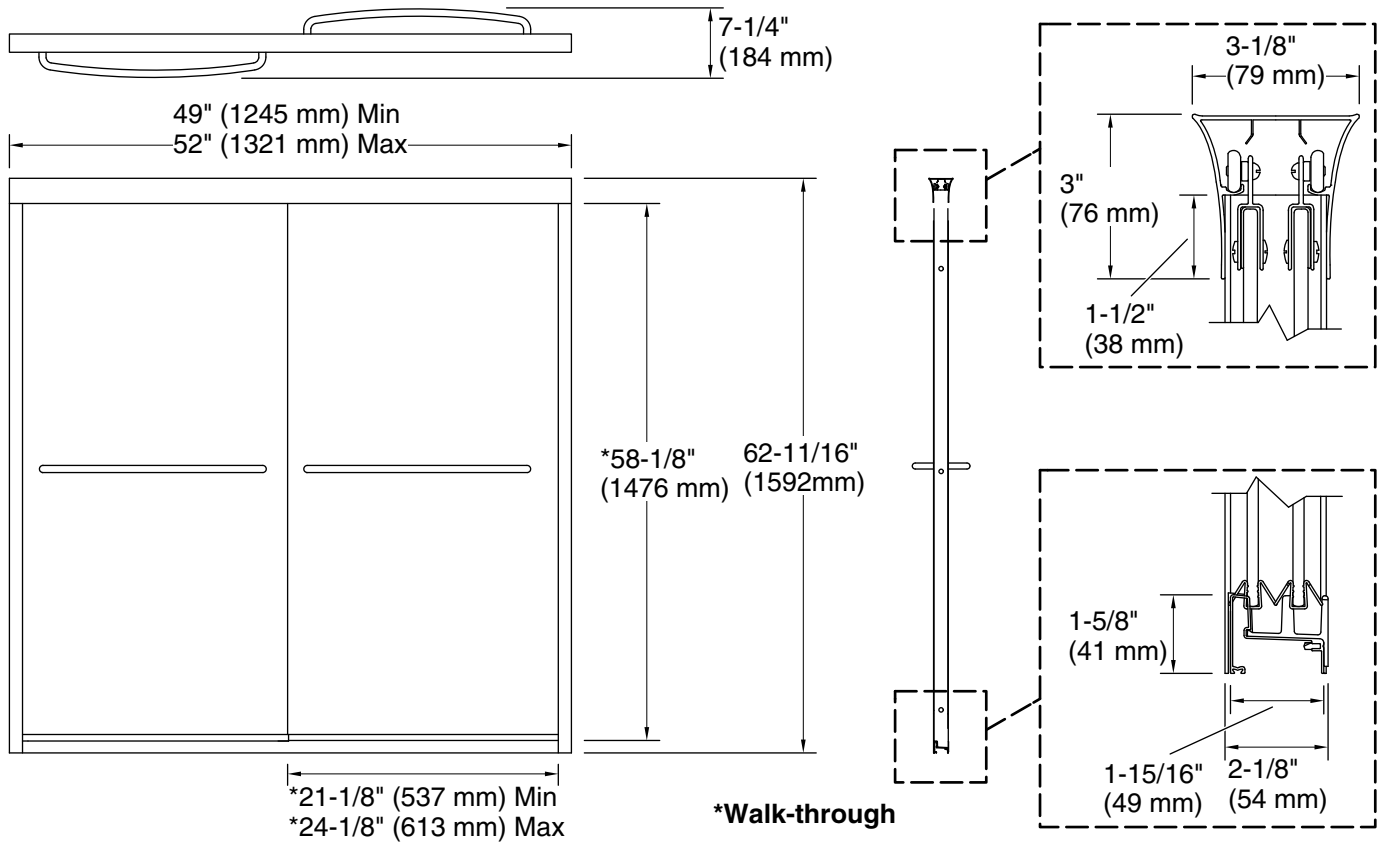See website for detailed warranty information.

Available Colors/Finishes
Color tiles intended for reference only.

Color	Code	Description
	SHP	Bright Polished Silver

Available Glass Options

Code	Description
L	Crystal Clear

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
9-24-2021 05:08 - US/CA

THE BOLD LOOK
OF KOHLER®

7-1/4"
(184 mm)

49" (1245 mm) Min
52" (1321 mm) Max

3-1/8"
(79 mm)

3"
(76 mm)

1-1/2"
(38 mm)

*58-1/8"
(1476 mm)

62-11/16"
(1592mm)

1-5/8"
(41 mm)

*21-1/8" (537 mm) Min
*24-1/8" (613 mm) Max

*Walk-through

1-15/16"   2-1/8"
(49 mm)   (54 mm)

Technical Information
All product dimensions are nominal.

Installation type:	For shower base installation
Opening Width - Min:	49" (1245 mm)
Opening Width - Max:	52" (1321 mm)
Walk-through - Min:	21-1/8" (537 mm)
Walk-through - Max:	24-1/8" (613 mm)
Glass thickness:	1/4" (6 mm)
Glass coating:	CleanCoat®

Notes
Install this product according to the installation instructions.

The vertical opening should be a minimum of 64-5/8" (1641 mm) to allow for installation clearance.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
9-24-2021 05:08 - US/CA

THE BOLD LOOK
OF KOHLER®