# **KOHLER**<sub>®</sub>

Frameless sliding shower door K-702213-6L

### Features

- 1/4" (6 mm) thick Crystal Clear tempered glass.
- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Smooth, quiet operation.
- Gently curved inside and outside towel bars complete the look of this door.
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

### Material

- Tempered glass ensures maximum safety and durability.
- Anodized aluminum prevents rust and corrosion.

### Installation

- Fits opening widths 40" 43" (1016 mm –1092 mm).
- Out-of-plumb adjustability simplifies installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- For residential use only.
- Not for use in hospitality.

### **Recommended Products/Accessories**

K-23723 Faucet cleaner

### **Included Components**

Additional Components: Hardware kit



### **Codes/Standards**

CPSC 16CFR 1201 ANSI Z97.1

## KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

Color Code Description



SHP Bright Polished Silver

### Available Glass Options Code Description


L Crystal Clear



### **Fluence**®

**KOHLER**<sub>®</sub>


Frameless sliding shower door K-702213-6L

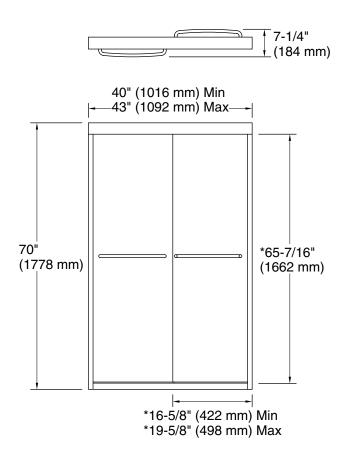

### **Technical Information**

All product dimensions are nominal.

•	
Installation type:	For shower base installation
Opening Width - Min:	40" (1016 mm)
Opening Width - Max:	43" (1092 mm)
Walk-through - Min:	16-5/8" (422 mm)
Walk-through - Max:	19-5/8" (498 mm)
Glass thickness:	1/4" (6 mm)
Glass coating:	CleanCoat®

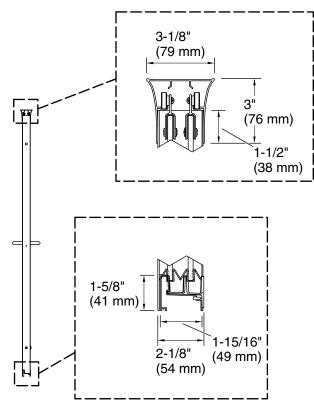

\*Walk-through

#### Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 72" (1829 mm) to allow for installation clearance.

