

Levity® Frameless Sliding Shower Door K-706015-L

Features

- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.
- Cushioned center guide provides smooth, quiet sliding action.
- Gently curved towel bars, inside and outside, provide integrated storage on the door.
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

Material

Frameless, 1/4" (6 mm) thick Crystal Clear tempered glass.

Installation

- Sliding shower door.
- Not for use in hospitality.

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components: Hardware kit



Codes/Standards

CPSC 16CFR 1201 ANSI Z97.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------------------|
| | SH | Bright Silver |
| | MX | Matte Nickel |
| | ABV | Anodized Brushed Bronze |
| | 2MB | |
| | ABZ | Anodized Dark Bronze |
| | BL | Matte Black |


Available Glass Options Code Description

L Crystal Clear





Levity® Frameless Sliding Shower Door K-706015-L

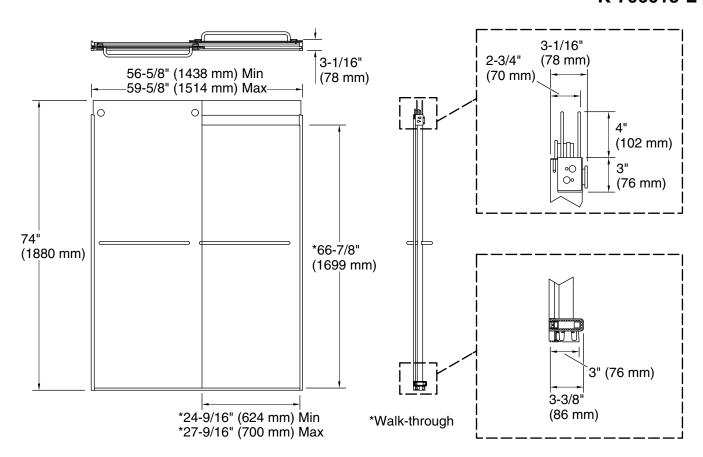

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening style: Sliding/Bypass
Opening Width - 56-5/8" (1438 mm)

Min:

Opening Width - 59-5/8" (1514 mm)

Max:

Walk-through - Min: 24-9/16" (624 mm) Walk-through - Max: 27-9/16" (700 mm)

Base-To-Wall 1/2" (13 mm)

Radius – Max:

Glass thickness: 1/4" (6 mm)
Glass coating: CleanCoat®

Notes

Install this product according to the installation guide.

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes.

The vertical opening should be a minimum of 76-1/2" (1943 mm) to allow for installation clearance.

