

# Revel® Frameless Sliding Bath Door K-707000-D3

#### **Features**

- Contemporary towel bar and knob combination offers storage on the outside of the door without encroaching on the bathing space.
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

# Technology

- Frameless ¼" (13 mm) frosted tempered glass.
- Center-guided mechanism for smooth, quiet sliding action and easy cleaning.
- Frameless design with minimal metal allows for greater ease of cleaning.
- Low bottom track creates easy entry and exit to the bathing space.

## Installation

- Out-of-plumb adjustability simplifies installation.
- Sliding bath door.
- Not for use in hospitality.

# **Recommended Products/Accessories**

K-23723 Faucet cleaner

## **Included Components**

Additional Components:

Hardware kit



# Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

# KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	SHP	Bright Polished Silver
	ABZ	Anodized Dark Bronze
1	BNK	Anodized Brushed Nickel


# Available Glass Options Code Description

D3 Frosted







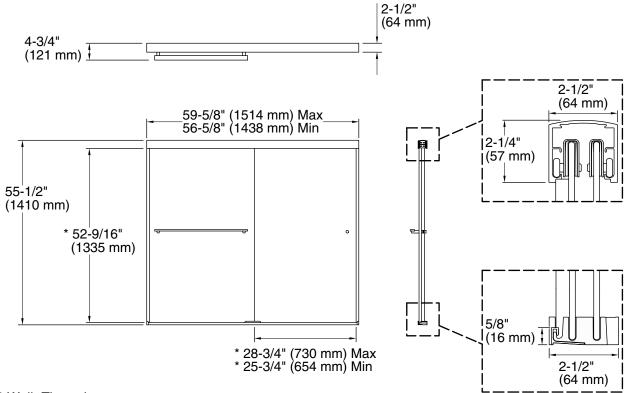

<sup>\*</sup> Walk-Through

## **Technical Information**

All product dimensions are nominal.

Installation type: For bath installation Opening style: Sliding/Bypass Opening Width - 56-5/8" (1438 mm)

Min:

Opening Width - 59-5/8" (1514 mm)

Max:

Walk-through - Min: 25-3/4" (654 mm)
Walk-through - Max: 28-3/4" (730 mm)
Base-To-Wall 3/8" (10 mm)

Radius - Max:

Glass thickness: 1/4" (6 mm)
Glass coating: CleanCoat®

#### **Notes**

Install this product according to the installation guide.

Wall jambs are made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 58" (1473 mm) to allow clearance for installing the top track over the wall jambs.

