

# Revel® Frameless Pivot Shower Door K-707500-L

#### **Features**

- Vertical handle complements the contemporary style.
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

#### Material

Frameless, 1/4" (6 mm) thick Crystal Clear tempered glass.

## **Technology**

- Self-closing mechanism offers superior performance and security against water leakage.
- Ultra-low threshold creates easy entry and exit to the showering space.
- Maximum width adjustability.

#### Installation

- Out-of-plumb adjustability simplifies installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- Pivot shower door.
- Not for use in hospitality.

### **Recommended Products/Accessories**

K-23723 Faucet cleaner

### **Included Components**

Additional Components:

Hardware kit



### Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

# KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	SHP	Bright Polished Silver
	ABZ	Anodized Dark Bronze
1	BNK	Anodized Brushed Nickel


## Available Glass Options Code Description

L Crystal Clear





# Revel® Frameless Pivot Shower Door K-707500-L

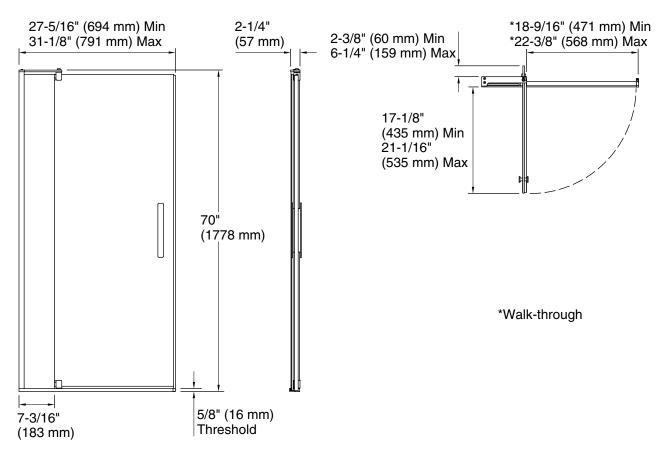

#### **Technical Information**

All product dimensions are nominal.

Installation type: For shower base installation

Opening style: Pivot

Opening Width - 27-5/16" (694 mm)

Min:

Opening Width - 31-1/8" (791 mm)

Max:

Walk-through - Min: 18-9/16" (471 mm)
Walk-through - Max: 22-3/8" (568 mm)
Base-To-Wall 3/8" (10 mm)

Radius – Max:

Glass thickness: 1/4" (6 mm)
Glass coating: CleanCoat®

#### **Notes**

Install this product according to the installation guide.

Strike jamb is made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 74" (1880 mm) to allow clearance

for installation.

