KOHLER_®

Revel® Frameless Pivot Shower Door K-707501-L

Features

- Vertical handle complements the contemporary style.
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

Material

Frameless, 5/16" (8mm) thick Crystal Clear tempered glass.

Technology

- Self-closing mechanism offers superior performance and security against water leakage.
- Ultra-low threshold creates easy entry and exit to the showering space.
- Maximum width adjustability.

Installation

- Out-of-plumb adjustability simplifies installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- Pivot shower door.
- Not for use in hospitality.
- For residential use only.

Recommended Products/Accessories K-23723 Faucet cleaner

Included Components

Additional Components: Hardware kit



Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

KOHLER[®] One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description



SHP Bright Polished Silver ABZ Anodized Dark Bronze

ABZ Anodi

BNK Anodized Brushed Nickel

Available Glass Options


Code Description

L Crystal Clear





Revel® Frameless Pivot Shower Door K-707501-L

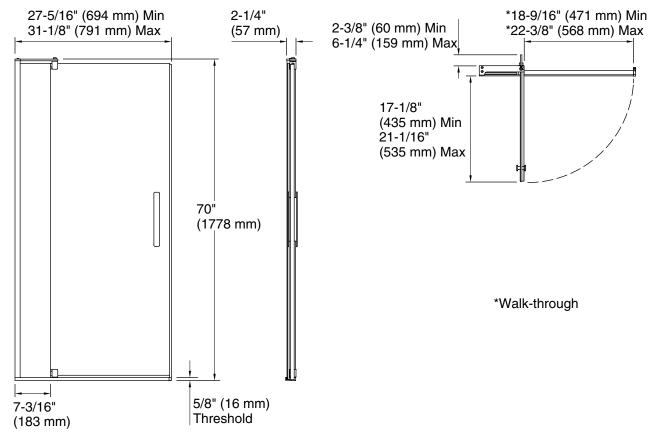

Technical Information

All product dimensions are nominal.

Installation type: Opening style:	For shower base installation Pivot
Opening Width - Min:	27-5/16" (694 mm)
Opening Width - Max:	31-1/8" (791 mm)
Walk-through - Min:	18-9/16" (471 mm)
Walk-through - Max:	22-3/8" (568 mm)
Base-To-Wall Radius – Max:	3/8" (10 mm)
Glass thickness:	5/16" (8 mm)
Glass coating:	CleanCoat®

Notes

Install this product according to the installation guide.

Strike jamb is made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 74" (1880 mm) to allow clearance for installation.

