

Revel® Frameless Pivot Shower Door K-707546-L

Features

- Vertical handle complements the contemporary style.
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

Material

Frameless, 5/16" (8mm) thick Crystal Clear tempered glass.

Technology

- Self-closing mechanism offers superior performance and security against water leakage.
- Ultra-low threshold creates easy entry and exit to the showering space.
- Maximum width adjustability.

Installation

- Out-of-plumb adjustability simplifies installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- Pivot shower door.
- Not for use in hospitality.
- For residential use only.

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components:

Hardware kit



Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	SHP	Bright Polished Silver
	ABZ	Anodized Dark Bronze
1	BNK	Anodized Brushed Nickel


Available Glass Options Code Description


L Crystal Clear





Revel® Frameless Pivot Shower Door K-707546-L

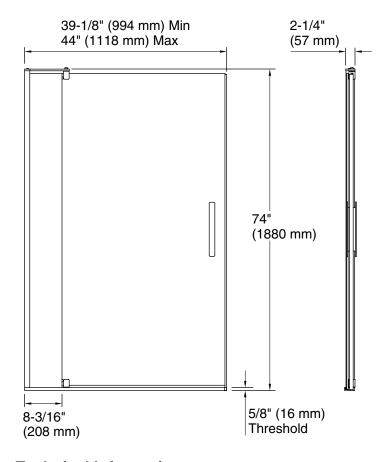



*Walk-through

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening style: Pivot

Opening Width - 39-1/8" (994 mm)

Min:

Opening Width - 44" (1118 mm)

Max:

Walk-through - Min: 29-3/8" (745 mm)
Walk-through - Max: 34-1/4" (869 mm)
Base-To-Wall 3/8" (10 mm)

Radius - Max:

Glass thickness: 5/16" (8 mm)
Glass coating: CleanCoat®

Notes

Install this product according to the installation guide.

Strike jamb is made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 78" (2032 mm) to allow clearance

for installation.

