



## Top-mount/undermount kitchen sink K-75791-2PC

### Features

- Two faucet holes.
- 9" (229 mm) depth provides generous workspace.
- With Malleco™ pull-down kitchen faucet with soap/lotion dispenser in Vibrant Stainless.

### Material

- 1.8 gpm (6.8 lpm) maximum flow rate at 60 psi (4.1 bar).
- Premium 18-gauge stainless steel.

### Installation

- Top-mount or undermount.

### Recommended Products/Accessories

- K-3129 Sink rack for Undertone® and Verse™ kitchen sinks
- K-8801 Sink drain and strainer with tailpiece
- K-8799 Sink drain and strainer basket
- K-3132 Sink rack for Undertone® and Verse™ kitchen sinks

### Optional Products/Accessories

- K-9000 P-Trap

### Included Components

Additional Components:

- K-R562-SD Pull-down kitchen sink faucet w/ soap/lotion dispenser
- Installation hardware
- kitchen sink utility rack (K-5473-CHR)
- sink strainers (qty 2)




### Codes/Standards

- ASME A112.19.3/CSA B45.4
- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61
- NSF/ANSI 372
- All applicable US Federal and State material regulations
- DOE - Energy Policy Act 1992
- California Energy Commission (CEC)

### Lifetime Limited Warranty for KOHLER® Stainless Steel Sinks KOHLER® Faucet Lifetime Limited Warranty KOHLER® One- Year Limited Warranty

See website for detailed warranty information.

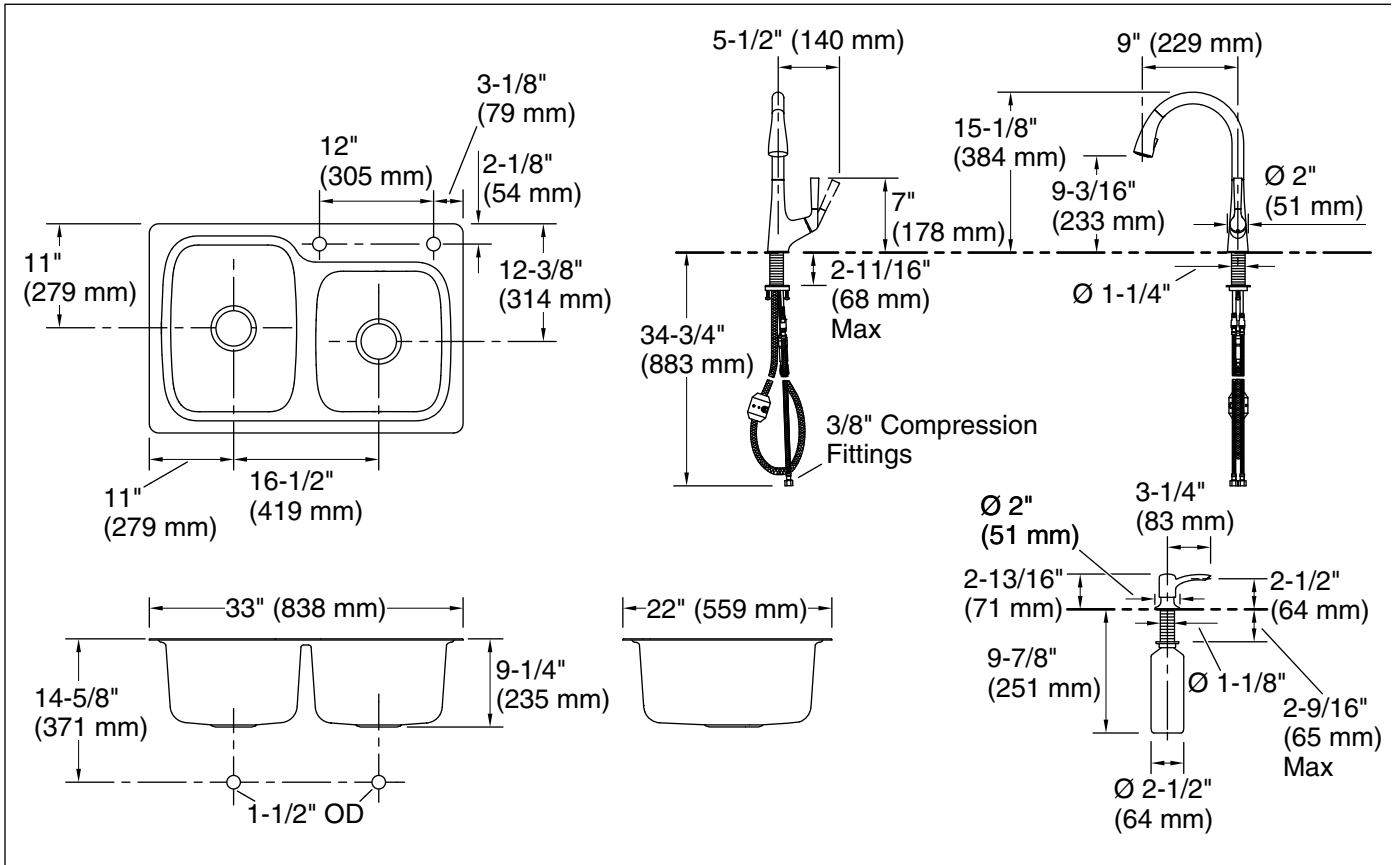

### Technical Information

All product dimensions are nominal.

Installation:	Top-mount
Min. base cabinet width:	36" (914 mm)
Bowl area (Right):	Length: 14-3/16" (360 mm) Width: 15-11/16" (398 mm) Bowl depth: 9" (229 mm) Water depth: 9" (229 mm)
Bowl area (Left):	Length: 14-3/16" (360 mm) Width: 18-7/16" (468 mm) Bowl depth: 9" (229 mm) Water depth: 9" (229 mm)
Number of deck holes:	2
Faucet hole(s):	1-7/16" (37 mm)
Soap/Lotion hole:	1-7/16" (37 mm)
Drain hole:	3-3/4" (94 mm)
Template:	1263722-7, required, included

### Notes

Install this product according to the installation instructions.