

## Features

- 4-7/8" (124 mm) diverter spout with slip-fit connection.
- Reversible 1/2" quarter-turn washerless ceramic disc valves.
- Lever handles.
- Includes showerhead with arm and flange.

## Material

- Premium construction ensures durability and reliability.

## Required Products/Accessories

For wall-mount installation

K-302-K 1/2" Ceramic In-Wall Valve System

## Recommended Products/Accessories

K-23723 Faucet cleaner

## Optional Products/Accessories

56374 Elongated Escutcheons



## Codes/Standards

ASME A112.18.1/CSA B125.1

DOE - Energy Policy Act 1992

## KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	CP	Polished Chrome
---	----	-----------------

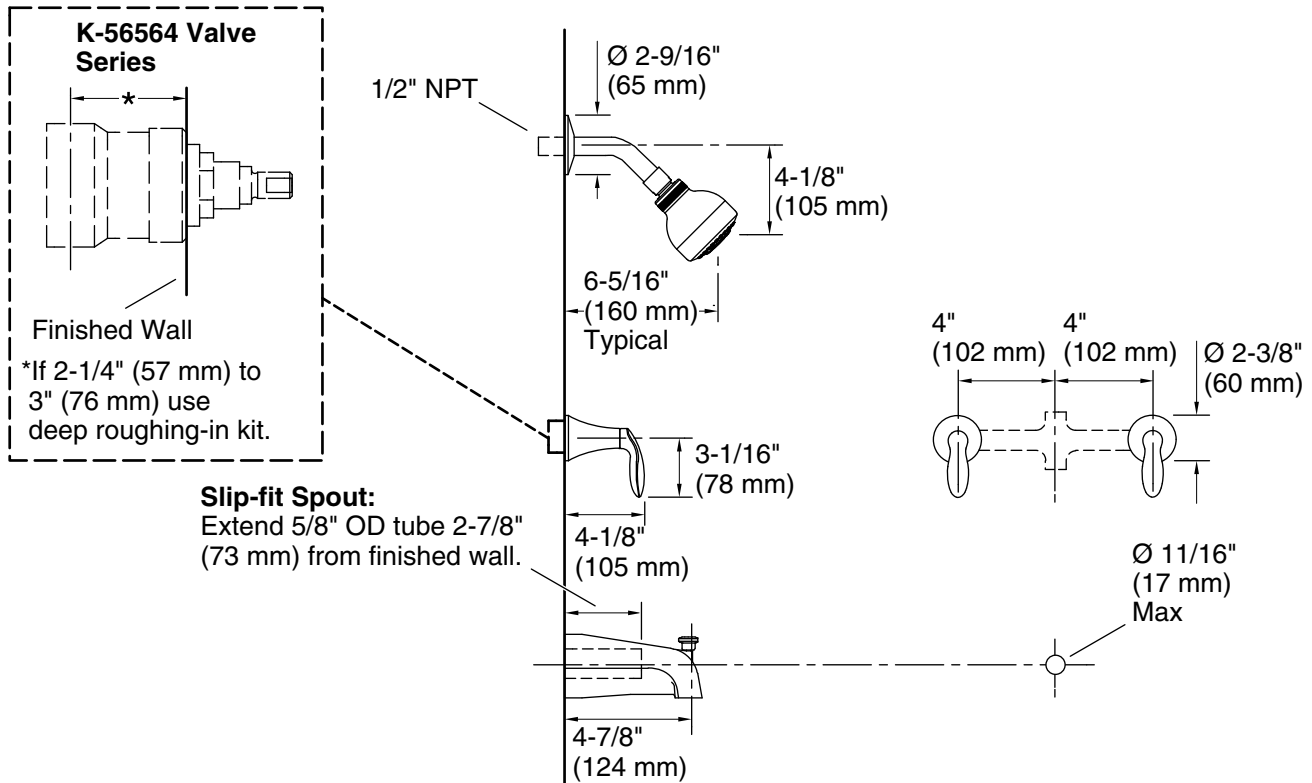

## Technical Information

All product dimensions are nominal.

### Showerhead/Body Spray:

Rated maximum flow: 2.5 gal/min (9.5 l/min)

Pressure: 80 psi (5.5 bar)

## Notes

Install this product according to the installation guide.