

Features

- Includes faceplate with handle, shower arm with flange and showerhead.
- Single lever handle allows for simultaneous on/off activation and temperature setting.
- Coordinates with Coralais faucets, accessories, and showering components to complete your bathroom.
- Includes single-function 1.75 gpm (6.6 lpm) showerhead.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations.

Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

Trim only; requires valve to complete installation (sold separately).

Required Products/Accessories

K-304/K-P304 Series Rite-Temp® Valves

or

K-8304/K-P8304 Series Rite-Temp ${\ensuremath{\mathbb R}}$ Valve & Cartridge Kits or

K-8300/K-P8300 Series Rite-Temp® Valve Body Rough-ins K-8305/K-P8305 Series Rite-Temp® Cartridges

or

K-2971-KS 3/4" Pressure-balancing Valve

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

K-10350 Deep rough-in kit

K-10351 Test cap for K-8300 Series valve bodies



Rite-Temp® Shower Valve Trim

Coralais®

K-TS15611-4G





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description




CP Polished Chrome



KOHLER. Faucets

Coralais® Rite-Temp® Shower Valve Trim K-TS15611-4G

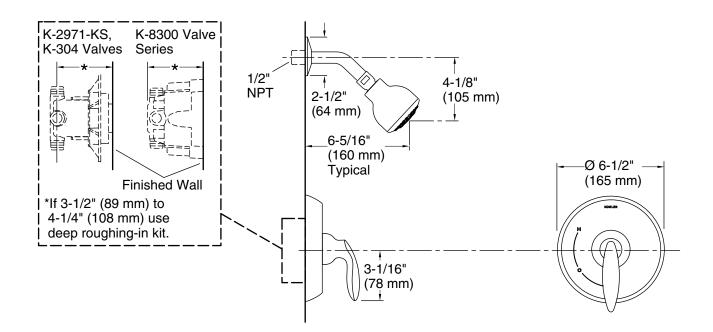

Technical Information

All product dimensions are nominal.

Showerhead/Body Spray:

Rated maximum 1.75 gal/min (6.6 l/min) flow: Pressure: 80 psi (5.5 bar)

Notes

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

