# Purist® Rite-Temp® Valve Trim K-TS14423-4

### **KOHLER** Faucets

### **Features**

- Includes faceplate with handle.
- Single handle controls both on/off activation and temperature settings.
- Complements Purist faucets and accessories.

### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

#### Installation

 Trim only; requires valve to complete installation (sold separately).

### Required Products/Accessories

K-2971-KS 3/4" Pressure-balancing Valve

or

K-304-CS Pressure-balancing Valve With Stops

or

K-304-CX Pressure-balancing Valve Less Stops

or

K-304-K Pressure-balancing Valve Less Stops

or

K-304-KS Pressure-balancing Valve With Stops

Oi

K-304-PS Pressure-balancing Valve With Stops

UI

K-304-PX Pressure-balancing Valve Less Steps

or

K-304-US Pressure-balancing Valve With Stops

or

K-304-UX Pressure-balancing Valve Less StopsorK-P304-CS Pressure-balancing Valve With Stops

or

K-P304-CX Pressure-balancing Valve Less Stops

or

K-P304-K Pressure-balancing Valve Less Stops

or

K-P304-KS Pressure-balancing Valve With Stops

or

K-P304-PS Pressure-balancing Valve With Stops

or

K-P304-PX Pressure-balancing Valve Less Stops

0

K-P304-UX Pressure-balancing Valve Less Stops

OI

K-P304-US Pressure-balancing Valve With Stops

Or

K-8304-K Valve Body & Cartridge Kit Complete

or



ADA CSA B651 OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1 ADA ICC/ANSI A117.1 CSA B651 OBC


# KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BGD	Vibrant® Moderne Brushed Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	RGD	Vibrant Rose Gold
	VHR	








## **KOHLER**, Faucets

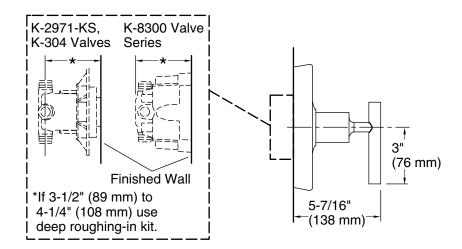



### **Technical Information**

All product dimensions are nominal.

### Showerhead/Body Spray:

Rated maximum 2.5 gal/min (9.5 l/min) flow:

### **Notes**

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

