

Loure[®] Touchless faucet w/Kinesis[™] sensor, DC-powered K-124L36-SANL

Features

- Kinesis[™] technology with concealed sensor allows for a clean aesthetic and provides extraordinarily accurate and reliable actuation in varying installation environments.
- Below-counter valving reduces the faucet footprint and provides easier service.
- Design-forward aesthetic for commercial bathroom spaces.
- 0.5 gal/min (1.9 l/min) flow rate.
- AA battery-powered; up to four-year battery life (approx. 105,000 cycles).
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water.
- Vandal-resistant outlet with laminar flow.
- 18" (457 mm) stainless steel braided flexible supply hose for easy installation.
- 8-1/8" (206 mm) spout reach.
- Includes grid drain (K-7129-A).
- Concealed mechanical mixer not included.
- Safe Drinking Water Act (low-lead) compliant.

Material

- Brass spout.
- Cast brass valve.

Technology

 Kinesis[™] sensor technology offers on-demand detection for maximum water savings.

Installation

- Wall-mount.
- Includes spout assembly, grid drain, control box assembly, supply hose and standard mounting hardware.
- Includes four AA batteries.

Included Components

Additional Components: K-7129-A Drain





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description




CP Polished Chrome



KOHLER. Faucets

Loure[®] Touchless faucet w/Kinesis[™] sensor, DC-powered K-124L36-SANL

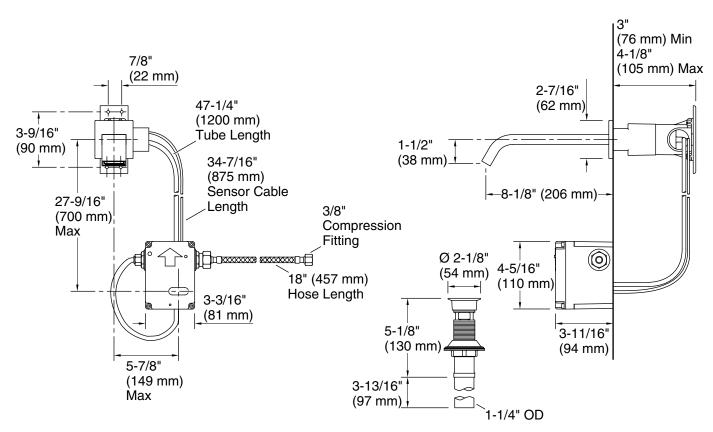

Technical Information

All product dimensions are nominal.

Power source: Battery - DC, included

Faucet:

Flow rate:0.5 gal/min (1.9 l/min)Pressure:60 psi (4.1 bar)Valve body:Cast brassDrain included:YesDrain tailpiece
included:Yes

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

