

Features

- 4-inch center faucet holes.
- Oval basin.
- Overflow drain.

Material

Vitreous china.

Installation

• Drop-in.

Recommended Products/Accessories

K-9018 P-Trap K-7129-A Drain





ADA CSA B651

Codes/Standards ASME A112.19.2/CSA B45.1 ADA ICC/ANSI A117.1 CSA B651

KOHLER[®] One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

0	White
96	Biscuit
47	Almond
NY	Dune
95	lce™ Grey
G9	Sandbar
33	Mexican Sand™

- K4 Cashmere
- 58 Thunder™ Grey
- 7 Black Black™



KOHLER_®

Bryant[®] Oval


24" (610 mm)

(203 mm) Min

11" (279 mm)

(229 mm) Min

Bathroom Sink K-2699-4

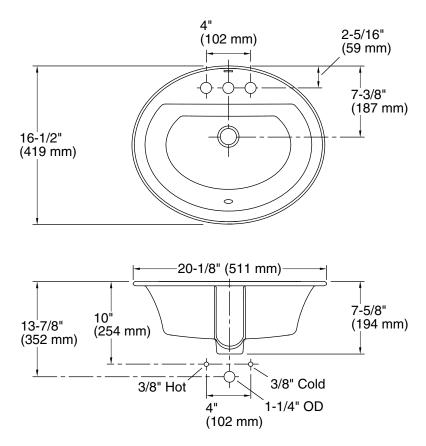

Technical Information

All product dimensions are nominal.			
Installation:	Drop-in		
Bowl area:	Length: 17-3/8" (441 mm) Width: 11-1/8" (283 mm) Water depth: 5-5/8" (143 mm)		
Number of deck holes:	3		
Faucet hole spacing:	4" (102 mm)		
Faucet hole(s):	1-1/4" (32 mm)		
Drain hole:	1-3/4" (44 mm)		
Template:	1155261-7, required, included		

Notes

Install this product according to the installation instructions.

Spout must be 5" (12.7 cm) long (min) for adequate clearance into the lavatory when installed with the centerline as shown.

3-11/16"

(94 mm)

8"

9"

Recommended ADA Installation

34"

(864 mm)

27'

. Min

(686 mm)

Spout must be tall enough to clear 3" (7.6 cm) rim height and provide a 1" (2.5 cm) air gap per ASME A112.1.1.

NOTICE: Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-4-KOHLER). Kohler Co. is not responsible for cutout errors when the incorrect cut-out template is used.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

