KOHLER. Faucets

Features

- 7" (178 mm) spout reach.
- Tall height is ideal for vessel-style sinks.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.1bar)].
- Single pin handle allows for both volume and temperature control.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- Includes metal pop-up drain with 1-1/4-inch metal tailpiece.
- Coordinates with Components faucets, accessories, and showering components to complete your bathroom.

Material

- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.

Technology

 KOHLER[®] ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.

Installation

- For single-hole installation.
- Pre-attached flexible supply lines simplify installation.

Water Conservation & Rebates

• This product can help a building earn Water Efficiency points in the LEED® Green Building Rating System.





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Polished Chrome

Matte Black

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

CP

BL

THE BOLD LOOK


1-800-4KOHLER (1-800-456-4537) Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to <u>www.kohler.com</u>. 12-24-2019 18:54 - US/CA/LM/MX

Components™

tall single-handle sink faucet K-77959-4A

Components™

tall single-handle sink faucet K-77959-4A

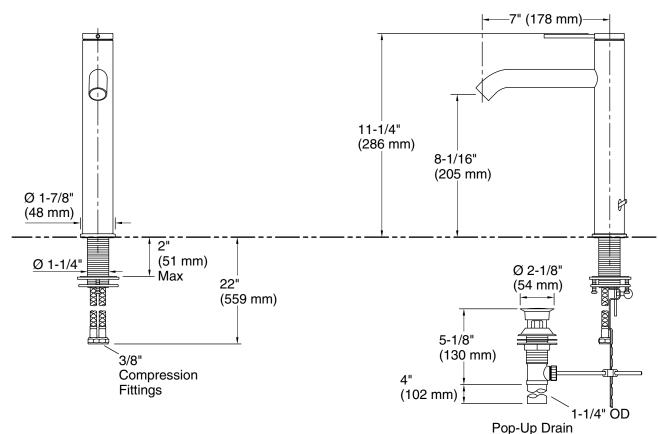

Technical Information

All product dimensions are nominal.

KOHLER, Faucets

Faucet:

Flow rate:	1.2 gal/min (4.5 l/min)
Pressure:	60 psi (4.1 bar)

Drain included:

Yes

Spout:

Spout reach:

7" (178 mm)

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

