

## Artifacts® Kitchen Sink Faucet Swing Spout K-99266

### Features

- High-arch swing spout with 360-degree rotation offers superior clearance for filling pots and cleaning.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- Single lever handle is simple to use and makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- Available with 8-1/2" (216mm) swing spout reach.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)]

#### Material

- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.

### Installation

- For one-hole installation. (3-hole escutcheon available, sold separately model number K-99272.)
- Flexible connections for easy installation.

### Adapters, Rough-in and Extension Kits

1012715Range: 3-1/4" (83 mm) - 5-3/8" (137 mm)1030920Range: 2-11/16" (68 mm) - 3-3/4" (95 mm)

### **Recommended Products/Accessories**

1054432 1.5 GPM (5.7 l/min) Aerator Kit K-99272 Three-Hole Kitchen Faucet Escutcheon K-77685 Single-Cartridge Water Filtration System K-77686 Double-Cartridge Water Filtration System K-77687 single replacement filter cartridge K-77688 Replacement Filter Cartridges, Two-Pack



ADA CSA B651

**Codes/Standards** ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

#### Color Code Description


| CP  | Polished Chrome          |
|-----|--------------------------|
| SN  | Vibrant® Polished Nickel |
| VS  | Vibrant® Stainless       |
| 2BZ | Oil-Rubbed Bronze        |



# **Artifacts**®

# KOHLER. Faucets

Kitchen Sink Faucet Swing Spout K-99266

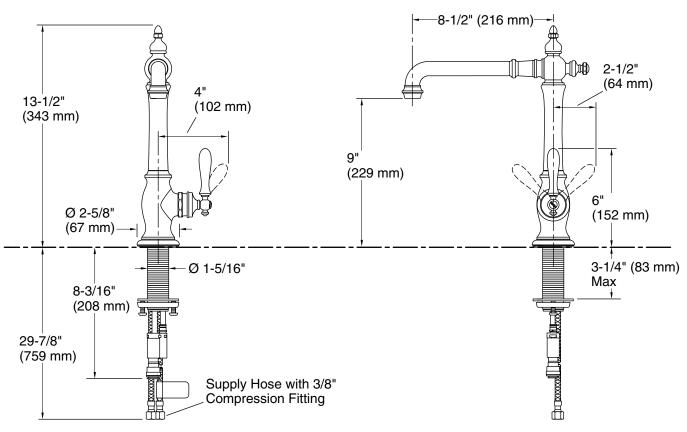

### **Technical Information**

All product dimensions are nominal.

#### Faucet:

Flow rate:1.5 gal/min (5.7 l/min)Pressure:60 psi (4.1 bar)

Spout:

Spout reach:

8-1/2" (216 mm)

#### Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

