Features

- · Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 7440 Lumens
- CRI 90+
- Integrated Defogger

Construction

- · Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount
- (Side Mirror Trim Panels included) or Recessed
- Includes installation hardware

Codes/Standards Applicable

- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931


Electrical System

- 120Vac, 60Hz, 55W
- Electric Current: 0.45A
- Wattage: 55W

Model

- SVANGE 9636DLLLRRR Swinging Door
- Included models in this configuration: Cabinet 1=1236L Cabinet 2=2436L Cabinet 3=1236L Cabinet 4=1236R Cabinet 5=2436R Cabinet 6=1236R

SVANGE9636DLLLRRR - Specification Sheet

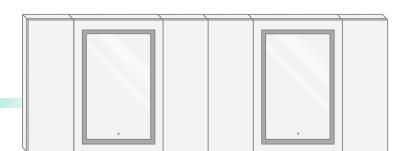


Electrical System


- Perfomance Requirments: Contains the required
- Supervisory Circiut with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency:60Hz
- Front Receptacle Current: 102-132Vac Nominal 15A
- USB Output Current:5VDC Nominal 4A




CABINET CONFIGURATION

Included models in this configuration:
Cabinet 1 = 1236L
Cabinet 3 = 1236L
Cabinet 4 = 1236R
Cabinet 5 = 2436R
Cabinet 6 = 1236R

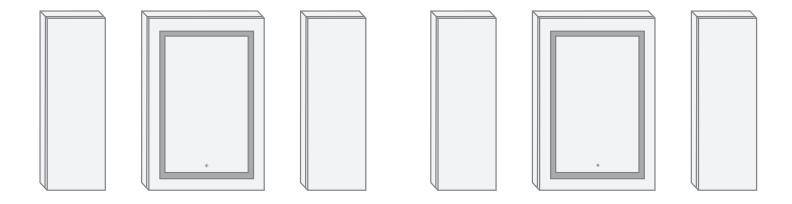

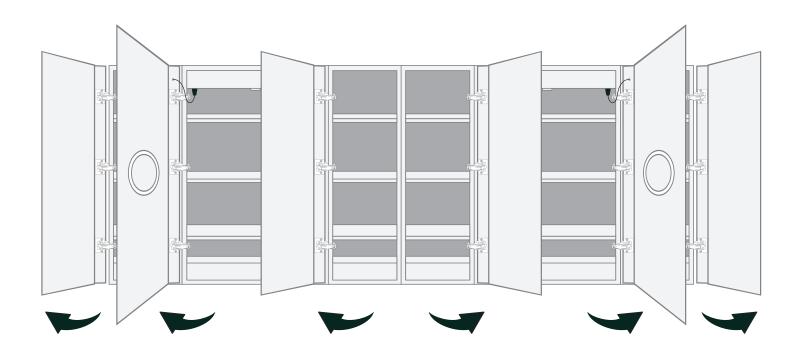





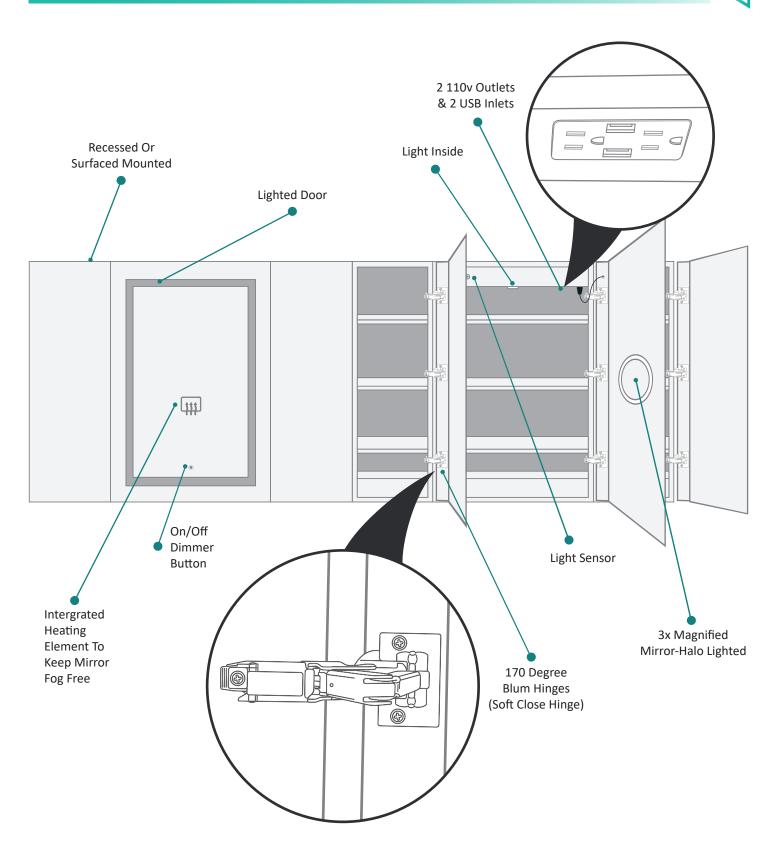



SURFACE MOUNT

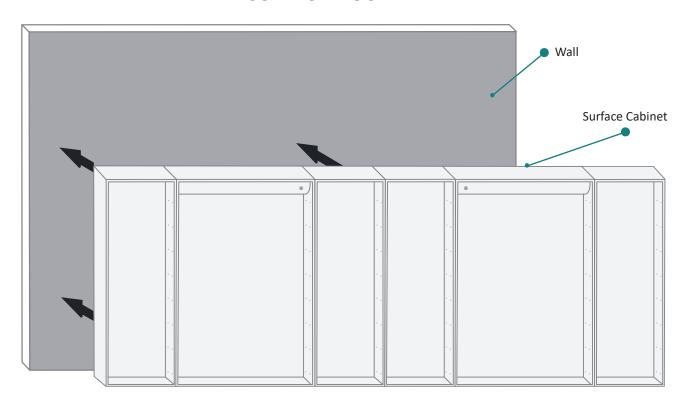

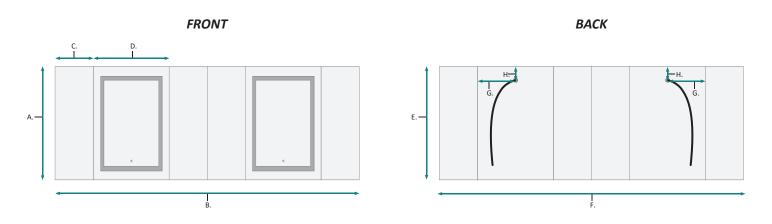


FRONT & BACKS


MODEL	А	В	С	D	E	F	G	Н
SVANGE 9636DLLLRRR	36	96	12	24	34-1/2	87	11-1/4	1-1/8





RECESSED MOUNT

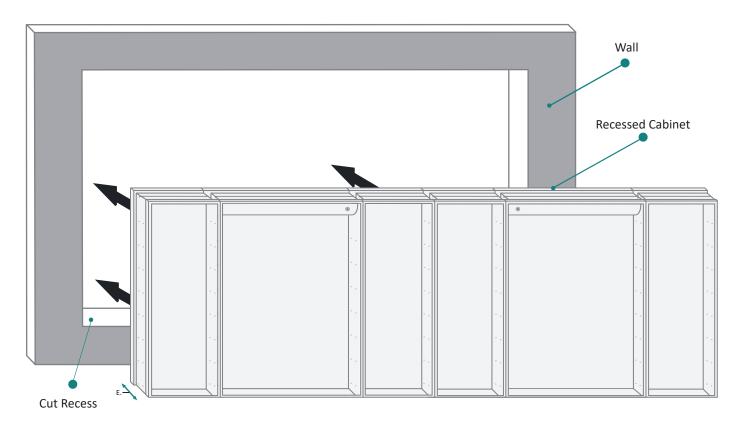

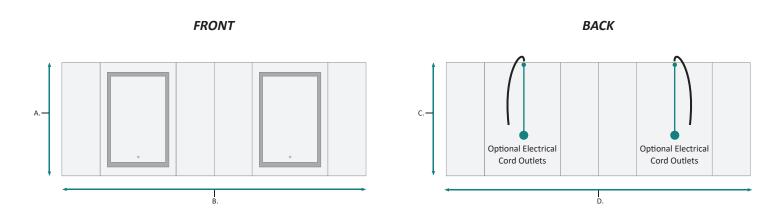


FRONT & BACKS

MODEL	А	В	С	D	E
SVANGE 9636DLLLRRR	36	96	34-1/2	87	3-7/8




RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

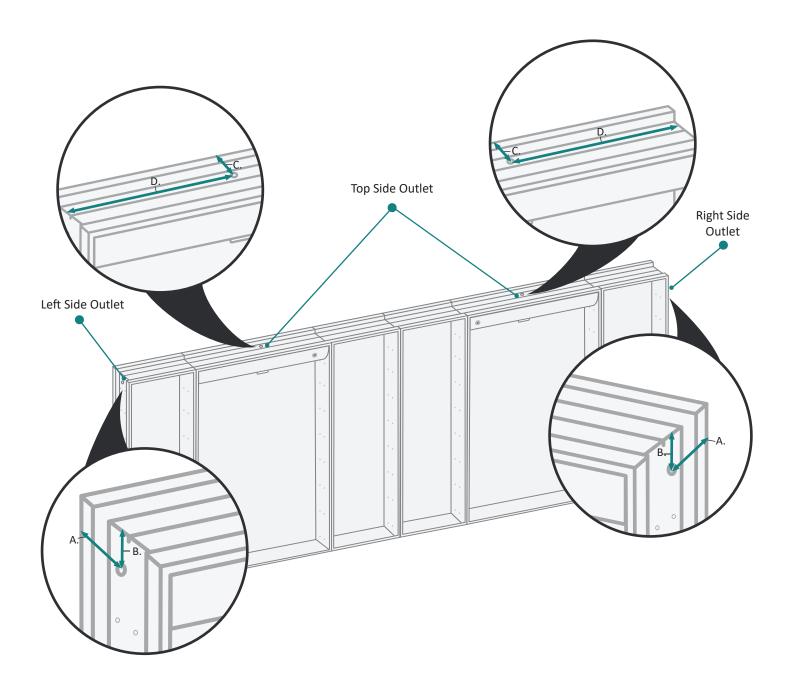

ELECTRICAL CORD LOCATIONS


MODEL	А	В	С	D
SVANGE 9636DLLLRRR	1-1/2	1-1/8	1-3/8	11-1/4



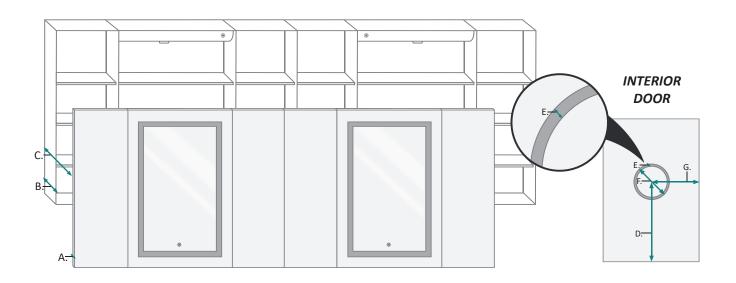

DOOR & CABINET

MODEL	А	В	С	D	E	F	G
SVANGE 9636DLLLRRR	7/8	3-7/8	4-3/4	18	3/8	5-1/4	11-1/4

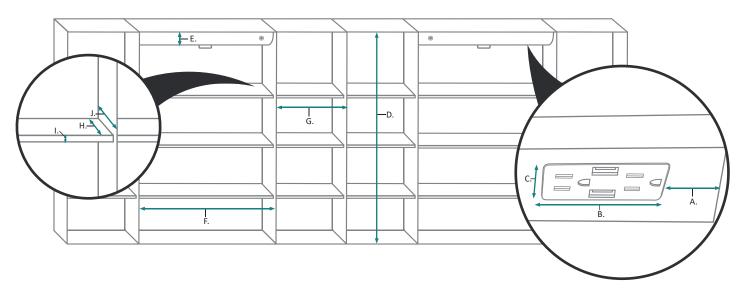

INTERIOR CABINET

MODEL	А	В	С	D	Е	F	G	Н	- 1	J
SVANGE 9636DLLLRRR	3-3/4	5-5/8	1-1/4	32-1/4	2-1/4	22-1/2	10-1/2	2-3/8	3/8	3-5/8