LULANI
Faucet Co

# Installation Instructions

## Maldives

KA-210-31

Single Handle Pull-Out Kitchen Faucet

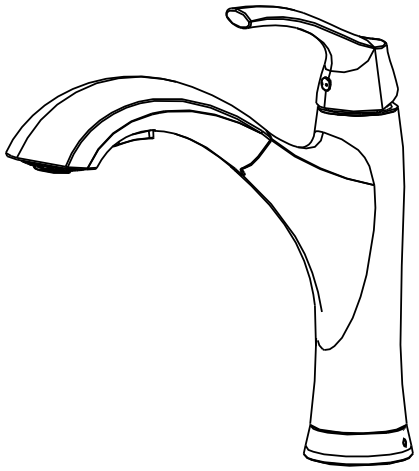

Thank you for selecting Lulani.
To ensure that your installation proceeds smoothly, please read these instructions carefully before you begin.

## Parts Included

1. Faucet
2. Spray head
3. Above sink hardware: rubber O-ring
4. Below sink hardware: Quick Connector
5. Counterweight
6. Water supply lines

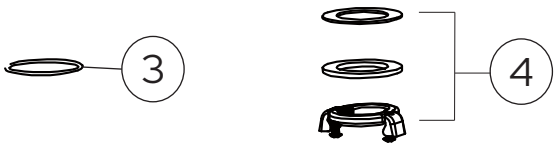





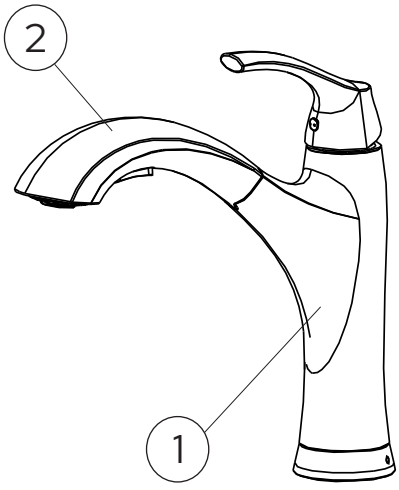


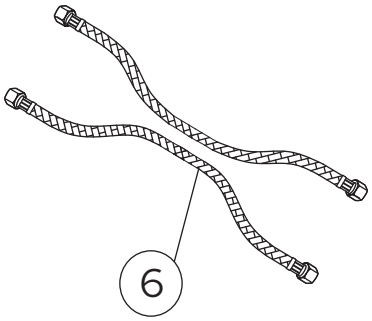


## Recommended Tools (not included)

1. Adjustable Wrench
2. Phillips Screwdriver
3. Safety Goggles
4. Flashlight
5. Bucket
6. Measuring Tape
7. Plumber's Putty
8. Channel Locks
9. Allen Key

## Caution: Tips for removal of old faucet

Always turn off the water supply before removing the existing faucet or replacing any part of the faucet. Open the faucet handle to relieve water pressure and ensure that water is completely shut off.

## Maintenance

Your new faucet is designed for years of trouble-free performance. Keep it looking new by cleaning it periodically with a soft cloth. Avoid abrasive cleaners, steel wool, and harsh chemicals as these will dull the finish and void your warranty.

## Step 1

Remove the rubber and metal washers and mounting nut from the base by hand twisting off.

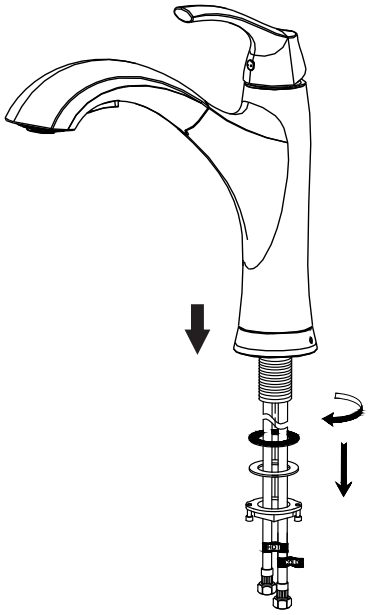

## Step 2

Insert the faucet through the installation hole. Secure the faucet by firmly hand tightening the rubber washer, metal washer and mounting nut back on the faucet threads underneath the sink. Tighten the screws on the mounting nut with a Phillips screwdriver.

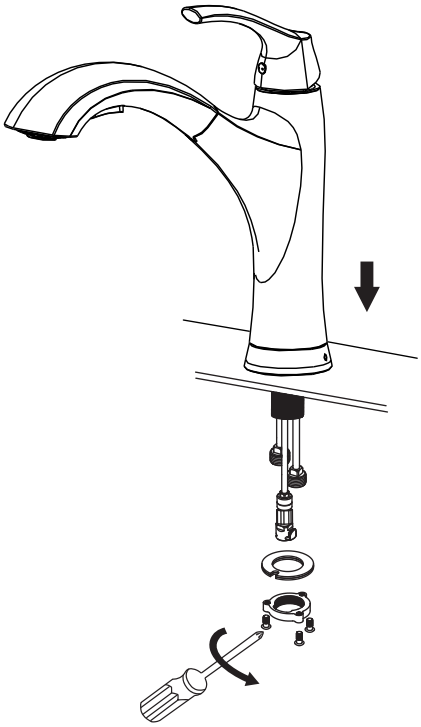

## Step 3

Assemble the quick connector (1) by inserting the clip (2) in to place. Attach the pull-out hose (3) to the quick connector. You will hear a light click or popping sound when it has been securely connected.

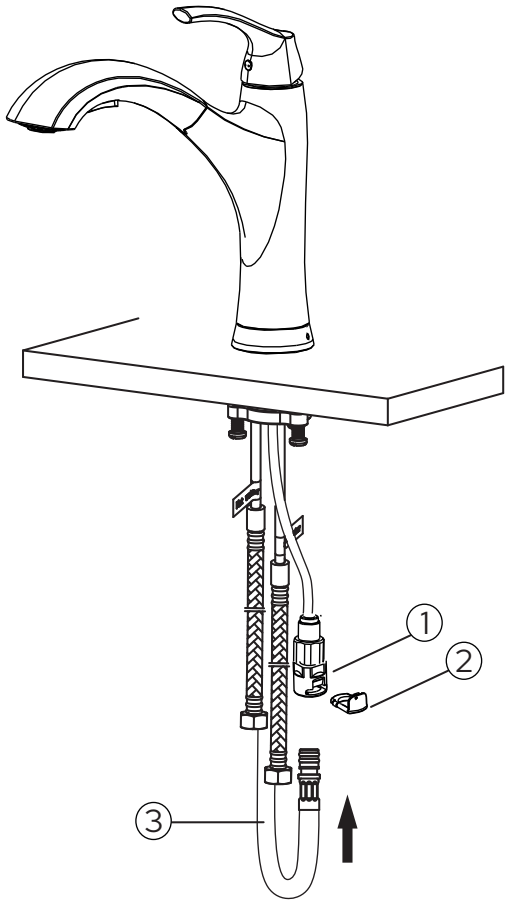


## Step 4

Connect the water supply lines to the hot and cold water valves. Tighten with an adjustable wrench. • • •• •‡ “ • Š†‰&

••† •• Š • • (

Make sure that the inlet hoses are not twisted.



hot supply hose

cold supply hose