# PATHFINDER I LED Outdoor Wall Mount

## 52120 / 52120PCH


- Aluminum & Glass
- 3000K Color Temperature
- CRI 90
- Wet Location
- 120-277V input
- Photocell option available
- Dark Sky option available









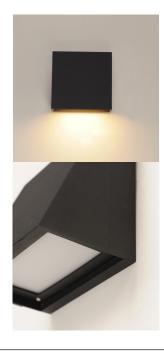


#### **PRODUCT DESCRIPTION**

With solid Die-Cast Aluminum construction and powered by a range voltage input driver, Pathfinder is a high performance down light for commercial and residential installations. Choose from triangular or spherical profiles as they discreetly extend from the wall. Available with a photocell option, these archetypal forms purposely blend into the architectural landscape creating safer spaces that shine light on locations of interest. Available in Black, Architectural Bronze, or Metallic Sliver

- · Always consult a qualified electrician before installing any lighting product
- Installation Requirements:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding at least 35 lbs



## **MEASUREMENTS**

DIMENSION : 5.5" W x 5.5" H x 4" Ext **BACK PLATE** : 5.5" W x 5.5" H x 2.75" HCO

HANGING WEIGHT : 2.03 lb

LAMPING

: 120-277V INPUT VOLTAGE

: 1,270 Rated (820 Del.) **LUMENS** 

: 1 x 15W LED PCB Integrated, 15W Total BULB

: (Integrated) **BULB INCLUDED** 

: Yes DIMMABLE : 90 CRI CRI : 3000K COLOR\_TEMP

### FINISHES OPTION

Architectural Bronze

Black Silver

\*Photocell option available in Architectural Bronze only

### MATERIAL

Aluminum, Glass

### **RATINGS**

**CETLUS** Wet Location JA8 Listed ADA DARKSKY











INSTALL UP/DOWN: UP **OPERATING TEMPERATURE:** -20°C (-4°F), 40°C (104°F)

PHOTOMETIC: Report Found Online



WESTERN DISTRIBUTION CENTER (HEADQUARTER) 253 NORTH VINELAND AVE I CITY OF INDUSTRY, CA 91746