



# WAFER | FLUSH/WALL MOUNT

58710 | 58711 | 58712 | 58713 | 58714 | 58715 | 58736 | 58737

58810 | 58812 | 58814 | \*58780 | \*58784

- Range Voltage Input 120-277V
- Die Cast Aluminum frame
- Edge Lit LED technology
- Energy Star and T24 Options
- Patented Driver **WO2022166960A1** Installation on select models
- For Dimmer information: See Dimming Compatibility Chart

Job Name : \_\_\_\_\_  
 Job Type : \_\_\_\_\_  
 Quantity : \_\_\_\_\_  
 Comments : \_\_\_\_\_

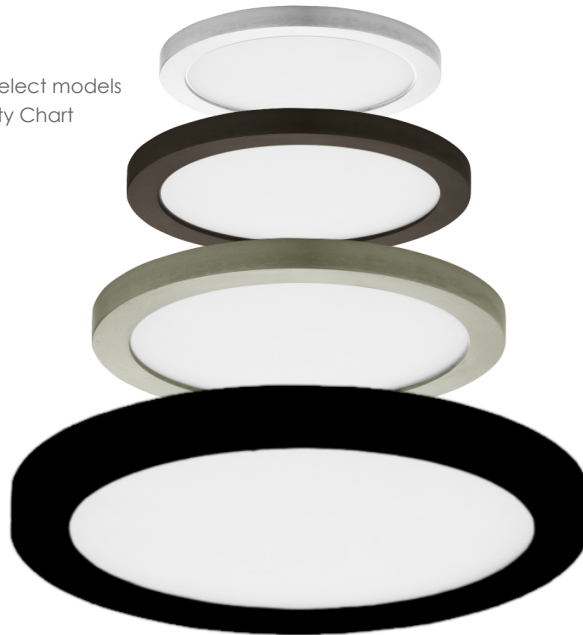

**58780WT**  
7" Empty Shell



**58784WTWT**  
Wafer LED 7"  
Emergency Back Up

## PRODUCT DESCRIPTION

Wafer was designed for the discriminate consumer who wants the low profile look of recessed without the high cost. Manufactured of die cast aluminum, Wafer brings ultimate heat dissipation to its edge lit technology. Edge lighting gives very even light distribution while dispersing heat over a larger area. The result of this is longer LED life and better light diffusion.

## MEASUREMENTS

### MODEL DIMENSION

58710	5.5"Ø x 0.5"H	58714	9"Ø x 0.5"H
58711	5.5"Ø x 0.5"H	58715	9"Ø x 0.5"H
58810	5.5"Ø x 0.5"H	58814	9"Ø x 0.5"H
58712	7"Ø x 0.5"H	58736	15"Ø x 0.5"H
58713	7"Ø x 0.5"H	58737	15"Ø x 0.5"H
58812	7"Ø x 0.5"H		
*58784	7"Ø x 1.5"H		

## LAMPING

MODEL	BULB TYPE	CCT	CRI	LUMENS		DIMMABLE	V INPUT
				RATED	DELIVERED		
58710	10W Integrated LED	3000K	90+	930	700	ELV	120-277V
58711	10W Integrated LED	3000K	90+	930	640	0-10V	120-277V
58712	15W Integrated LED	3000K	90+	1250	1150	ELV	120-277V
58713	15W Integrated LED	3000K	90+	1500	1100	0-10V	120-277V
58714	20W Integrated LED	3000K	90+	2100	1650	ELV	120-277V
58715	20W Integrated LED	3000K	90+	2250	1600	0-10V	120-277V
58736	30W Integrated LED	3000K	90+	3000	2500	ELV	120-277V
58737	30W Integrated LED	4000K	90+	3000	2500	0-10V	120-277V
58810	10W Integrated LED	4000K	90+	930	750	ELV	120-277V
58812	15W Integrated LED	4000K	90+	1500	1200	ELV	120-277V
58814	20W Integrated LED	4000K	90+	2200	1700	ELV	120-277V
*58784	17W Integrated LED	3000K	90+	1250	1150	0-10V	120-277V

\*EMERGENCY BACK UP MODEL. MINIMUM 15 HOURS FOR FULL CHARGE. LASTS 1.5 HOURS ON BATTERY

Always consult a qualified electrician before installing any lighting product


## FINISHES OPTIONS:

White (WT)

Bronze (BZ)

Satin Nickel (SN)

Black (BK)



## MATERIAL:

Aluminum  
Polycarbonate Lens

## AVAILABLE SIZES: \*NOMINAL

5" | 7" | 9" | 15"

## RATINGS:


cETLus Wet Location  
Energy Star 2.0  
Title 24 JA8 Compliant  
ADA extension  
Dimmable



## ADDITIONAL:


RATED LIFE: 50,000 Hours  
OPERATING TEMP: -20° C (-4°), 40°C  
(104°F) PHOTOMETRIC: Reports Available  
Patented Technology:  
WO2022166960A1 in 9" and above

3-0 or 4-0 junction box  
requires a minimum  
depth of 1.5"



Ø Diameter

\*58784

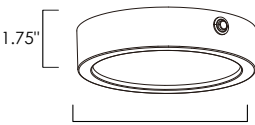

Ø 7"  
diameter



**WESTERN DISTRIBUTION CENTER (HEADQUARTER)**  
253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746  
**EASTERN DISTRIBUTION CENTER**  
101 GARDNER PARK | PEACHTREE CITY, GA 30269  
P. 626.956.4200 | F. 626.956.4225 | maximlighting.com