MOEN[®]


DESCRIPTION

Metal construction with various finishes identified by suffix • **OPERATION**

- Temperature operates through an 270° arc of handle • travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum • hot water temperature
- 90° rotation of transfer valve handle with stops •
- Pressure balancing mechanism maintains selected • discharge temperature to $\pm 3^{\circ}$
- **STANDARDS**
- Third party certified to ASME A112.18.1/CSA B-125.1 •
- ADA 🛃 for lever handles •


WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to • the original homeowner
- 10 year limited warranty when used in a multifamily installation •
- 5 year limited warranty when used in a commercial installation •
- Visit www.moen.com/support for complete details and limitations



Specifications

WYNFORD[™] POSI-TEMP[®] with Built-In 3 Function **Transfer Valve Trim**




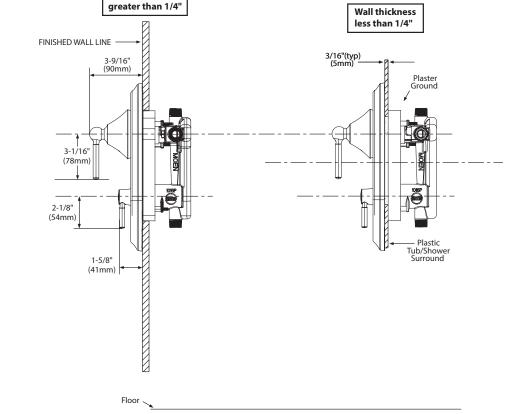



Wall thickness

FOR MORE INFORMATIONL: 1-800-BUY-MOEN www.moen.com



11-7/16"

Refer to valve specification sheet for cutout dimensions

8