

Buy it for looks. Buy it for life.®

DESCRIPTION

- Duralock™ quick connect installation
- · Metal construction with various finishes identified by suffix
- 1/2" IPS connections
- · Includes non-metal pop-up waste assembly

OPERATION

- · Lever style handles
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counter-clockwise to close)

FLOW

 Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
 1.2 gpm max (4.5L/min) at 60 psi

CARTRIDGE


- 1234 cartridge design
- Nonmetallic and stainless steel material

STANDARDS


- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking
- ADA 🕒 for lever handles

WARRANTY

• Limited lifetime warranty against leaks, drips and finish defects to the original consumer purchaser

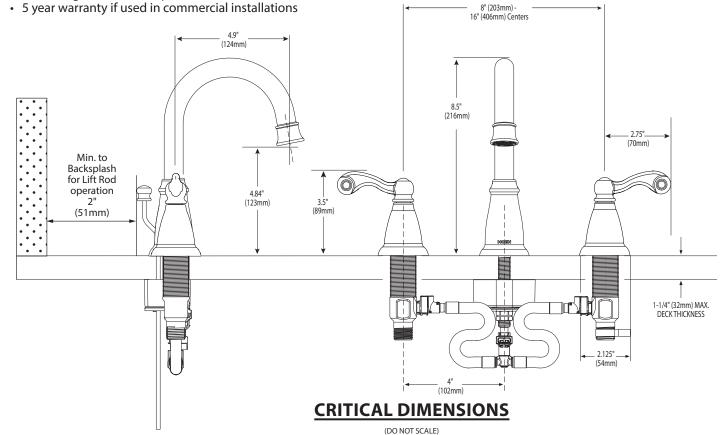

Specifications



TRADITIONAL® Two-Handle Widespread Lavatory Faucet

Models: WS84004 series

NOTE: SPOUT INSTALLS THROUGH 1-1/8" MIN. DIA. HOLE. VALVES INSTALL THROUGH 1-1/8" MIN. DIA. HOLE. FOR DECK THICKNESS 1-3/8" TO 3", USE SERVICE KIT NUMBER 115001. VALVES INSTALL THROUGH 1-1/4" DIA. HOLE.