


- | | |
|---|---|
| G135-1000 Finish(PC) <input type="checkbox"/> | G135-2000 Finish(PC) <input type="checkbox"/> |
| G135-1100 Finish(PC) <input type="checkbox"/> | G135-4000 Finish(PC) <input type="checkbox"/> |
| | G135-4100 Finish(PC) <input type="checkbox"/> |
| | G135-5000 Finish(PC) <input type="checkbox"/> |

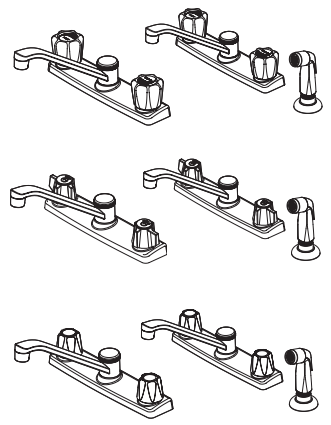

Specifications

Features

- 1.8 GPM Flow Rate
- Acrylic Windsor® Handles (1100 & 4100 Only)
- Blade Handles (2000 & 5000 Only)
- Includes Metal Supply Nuts
- 3-Hole Installation (1000, 1100, & 2000 Only)
- 4-Hole Installation (4000, 4100, & 5000 Only)
- White Side Spray (4000, 4100, & 5000 Only)
- Washerless Valves
- Pforever Warranty®

Code Compliance

- Pfister products are designed and manufactured in compliance with the following standards and codes:
- IAPMO Certified
 - CSA B125 Certified
 - ASME A112.18.1
 - NSF 61/9 Annex G (Low lead)
 - Cal Green Compliant
 - ADA Compliant-ANSI A117.1 (Lever handles only) (1100, 2000, & 5000 Only)
 - ASME A112.18.3 (Backflow Prevention)



Dimensions

