Pfister

Specifications

Features

1.2 GPM Flow Rate

• 3-Hole Installation

Pfast Connect

Waterfall Faucet

All Metal Construction


Mounting Hardware Included

Quick Install Tool Included

• PVD Finish (K Finish Only)

Brea™ 8"-20" Widespread Lavatory Faucet

> LF-049-BRKK Finish(KK) \Box LF-049-BRYY Finish(YY)



- Adjustable Install
- Pforever Seal
- Push & Seal[™] Pop-Up

Code Compliance



- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)

Pfister products are designed and

following standards and codes:


• EPA WaterSense Certification 1.2 gpm, 4.5 L/Min ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions



- Push and Seal™ Pop-Up •
- Pforever Seal Ceramic **Disc Valves**
- Pforever Warranty[®]

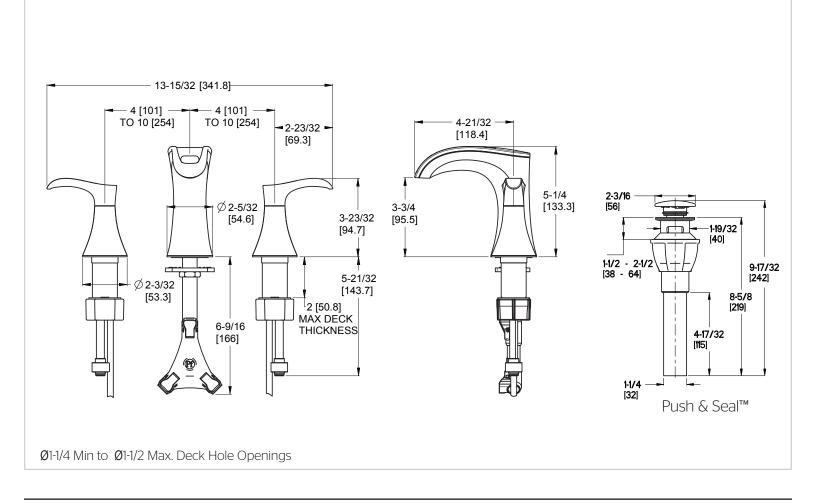

Copyright © 2019, Pfister Inc.