PHYLRICH®

Defining Luxury Since 1959

Water Pressure Recommended: 60 PSI

Lavatory Faucet with Tubular Cross Handles



PRODUCT FEATURES

- Style: Contemporary
- Collection: Basic
- Temperature Controlled By Handles
- Tubular Cross Handles

ADA Compliance: Yes

Deck Thickness Maximum: 2" Deck Thickness Minimum: 1/8" Drain Assembly Material: Brass Drain Style: Lift pop-up Fitting Hole Diameter: 1 1/8" Number of Holes: Three Hole Number of Handles: Two Handle Spread Maximum: 12" Handle Spread Minimum: 8" Handle Turn Angle: Quarter Turn Spout Reach: 67/8" Spout Height: Inlet Connection Type: Male 1/2" NPSM Installation Type: Deck Mounted Primary Material: Brass Valve Material: Ceramic Flow Restriction: 1.2 gpm Water Pressure Maximum: 85 PSI Water Pressure Minimum: 20 PSI

CODES & STANDARDS


UPC E


D136

ASME A112.181/ CSA B1251, ASME 112.18.2/ CSA B125.2, ANSI NSF, CEC, Watersense 61 Sect. 9, State of MA.

WARRANTY

Mechanical Warranty: 10 Years from date of purchase. Finish Warranty: See catalog for further information.

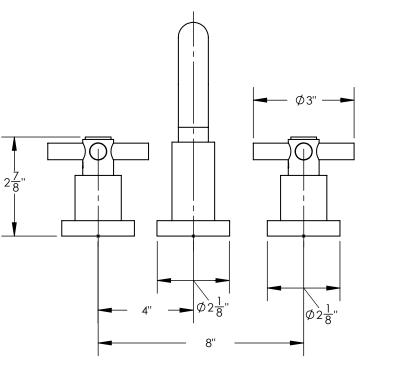

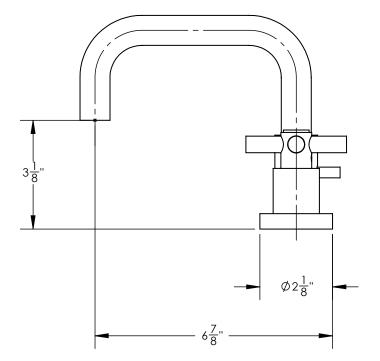

www.phylrich.com