

R6030AISC

59.5" x 30" x 19"

GENERAL SPECIFICATIONS:

Installation: Alcove

Material: Acrylic

Plumbed Weight: 105 lbs / 48 kg

Soaker Weight: 85 lbs / 39 kg


Average Fill: 32 gal to above jet level

Maximum Fill: 39 gal to overflow

NOTE: Filling this tub to the maximum may require an above average size or dedicated water heater.



Features integral front skirting and integral tile flange on 3 sides.

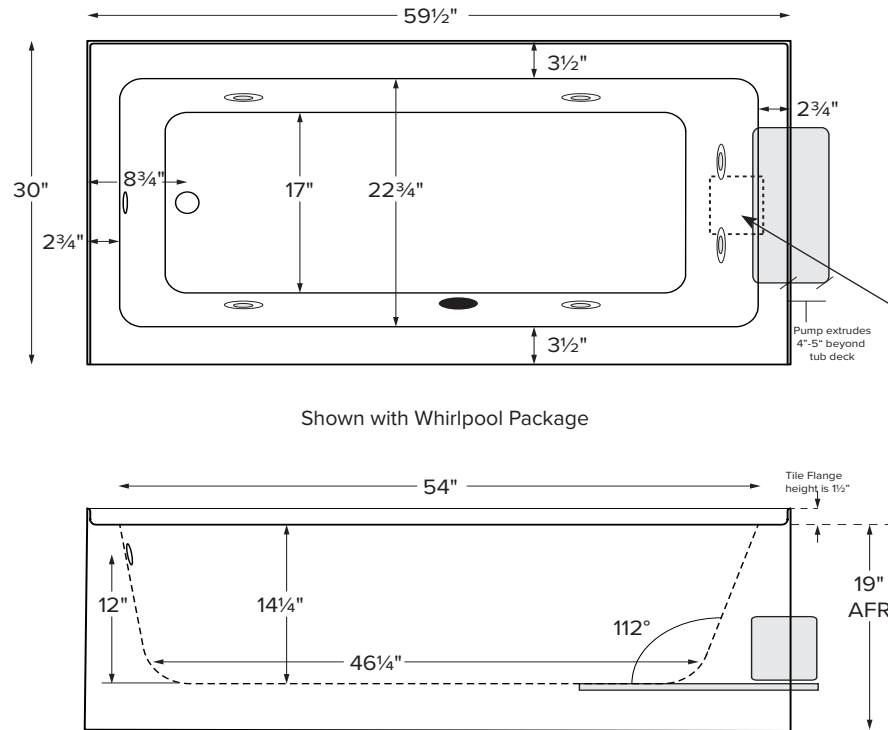

Shown with Whirlpool Package

Compliance Label
 Model MTXXXX
 Made in USA
 Complies with
 ANSI Z124.1-1995
 CSA Certified C/US

This tub model features a 19" skirt height that allows for above floor rough-in. Front access panel is not available.

ELECTRICAL SPECIFICATIONS

- Required Electrical Service** - 110 Volt
- Air Bath or Whirlpool** - 1-15 amp GFCI
- Soaker** - Inline Heater - 1-15 amp GFCI
- Air Bath with Inline Heater** - 2-15 amp GFCI
- Whirlpool with Inline Heater** - 1-15 amp GFCI

CSA Certified C/US; ANSI Z124.1
CSA Certified C/US; ANSI 112.19.7

IMPORTANT ORDERING & INSTALLATION INFORMATION:

- Before ordering or installing, please consider future access to all equipment.
- Integral flat front skirt is not removable.
- Must specify left- or right-hand drain when ordering.
- Please measure tub on-site before building tub decking.
- Use proper bedding compound to fully level and support tub.
- Tubs equipped with an air bath or a pre-leveled foam base are designed to rest on the floor without bedding compound, provided the floor is flat and level.
- Compliant with ASTM C 1028-07 coefficient of friction test.
- Jet, pump & blower locations are predetermined and cannot be changed.
- Suction and control locations may vary.

• Before discarding tub crate, check for accessories that may be packaged inside.
 • All product measurements are ±1/2".
 • Specifications and configurations are subject to change without notice.
 • Measurements herein supersede all others published prior to publication date below.

PACKAGE	PACKAGE CONTENTS	PART #
Soaker	Soaking bath - No jets. Integral front skirt, 3-sided integral tile flange and textured bottom.	R6030AISC
Air Bath	12 air jets, heated air blower, pre-leveled foam base, textured bottom, integral front skirt and 3-sided tile flange. <i>pre-leveled foam base increases overall tub height 2"-3"</i>	R6030AISCA
Whirlpool	6 point-massage jets, 1-bhp pump, integral front skirting, 3-sided integral tile flange, and textured bottom.	R6030AISCW

OPTIONS <i>(must be ordered at time of purchase)</i>
Color Upgrade: Biscuit (RCOLOR)
Inline Heater For Whirlpool (RHTI) Heater with Recirculating Pump for Soaker & Air Bath (RHTISOAK)
Quick Drain Connect Kit - Not available seperately, must be ordered with tub. Standard (RQUICK) Cast Iron (RQUICKCI)
ACCESSORIES
Lift and Turn Drain & Overflow Chrome (RWOC) Brushed Nickel (RWOBN) White (RWOW)
Pillows Soft Pillow White (RPSW) Black (RPSB) Roll-Up Pillow Light Aqua (RPRUC) Black (RPRUB)
INSTALLATION OPTIONS <i>(must be ordered at time of purchase)</i>
Pre-Leveled Foam Base (included with all airbaths) 5' Tubs (RPLFOAM) 5.5' & 6' Tubs (RPLFOAM2)



Front view of the integral skirt.