

R6032IS

60" x 32" x 19.25"

GENERAL SPECIFICATIONS:

Installation: Alcove

Material: Acrylic

Plumbed Weight: 129 lbs / 59 kg


Soaker Weight: 105 lbs / 48 kg

Average Fill: 34 gal to above jet level

Maximum Fill: 51 gal to overflow

Features integral front skirting, armrests & factory installed tile flange on 3 sides.

NOTE: Filling this tub to the maximum may require an above average size or dedicated water heater.

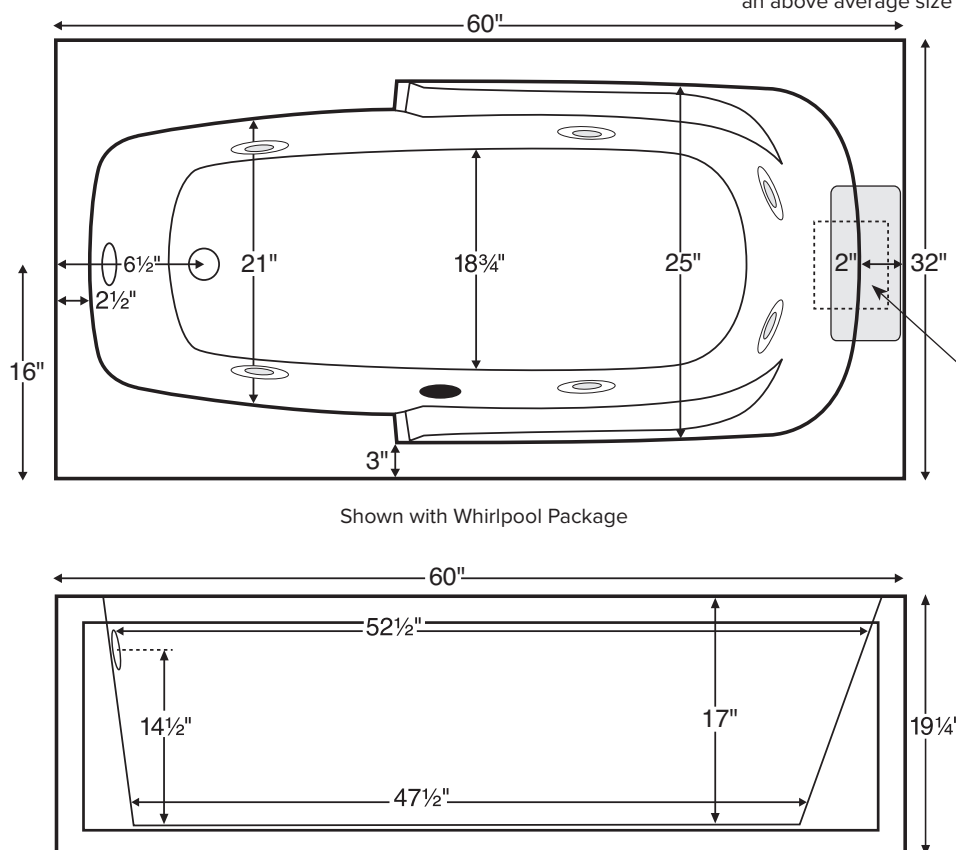

Shown with Whirlpool Package

Compliance Label
Model MTXXXX
Made in USA
Complies with
ANSI Z124.1-1995
CSA Certified C/US

ELECTRICAL SPECIFICATIONS

Required Electrical Service - 110 Volt

Air Bath or Whirlpool - 1-15 amp GFCI

Soaker - Inline Heater - 1-15 amp GFCI

Air Bath - Inline Heater - 1-15 amp GFCI

Whirlpool - Inline Heater - 1-15 amp GFCI

CSA Certified C/US; ANSI Z124.1

CSA Certified C/US; ANSI 112.19.7

IMPORTANT ORDERING & INSTALLATION INFORMATION:

- Before ordering or installing, please consider future access to all equipment.
- Must specify left- or right-hand drain when ordering.
- Tubs equipped with hydrotherapy components have a removable front panel.
- Please measure tub on-site before building tub decking.
- Use proper bedding compound to fully level and support tub.
- Tubs equipped with an air bath or a pre-leveled foam base are designed to rest on the floor without bedding compound, provided the floor is flat and level.
- Jet, pump & blower locations are predetermined and cannot be changed.
- Suction and control locations may vary.

• Before discarding tub crate, check for accessories that may be packaged inside.
• All product measurements are $\pm 1/2"$.
• Specifications and configurations are subject to change without notice.
• Measurements herein supersede all others published prior to publication date below.

| PACKAGE | PACKAGE CONTENTS | PART # |
|------------------|--|-----------------|
| Soaker | Soaking bath - No jets. Integral front skirt, 3-sided integral tile flange and textured bottom. | R6032ISS |
| Air Bath | 12 air jets, heated air blower, pre-leveled foam base, textured bottom, integral front skirt and 3-sided tile flange. <i>pre-leveled foam base increases overall tub height 2"-3"</i> | R6032ISA |
| Whirlpool | 6 point-massage jets, 1-bhp pump, integral front skirt, 3-sided integral tile flange and textured bottom. | R6032ISW |

| |
|--|
| OPTIONS <i>(must be ordered at time of purchase)</i> |
| Color Upgrade: Biscuit (RCOLOR) |
| Inline Heater For Whirlpool (RHTI) Heater with Recirculating Pump for Soaker & Air Bath (RHTISOAK) |
| ACCESSORIES |
| Lift and Turn Drain & Overflow Chrome (RWOC) Brushed Nickel (RWOBNI) White (RWOW) |
| Pillows Soft Pillow White (RPSW) Black (RPSB) Roll-Up Pillow Light Aqua (RPRUC) Black (RPRUB) |
| INSTALLATION OPTIONS <i>(must be ordered at time of purchase)</i> |
| Pre-Leveled Foam Base (included with all airbaths) 5' Tubs (RPLFOAM) 5.5' & 6' Tubs (RPLFOAM2) |



Front view of the integral skirt.